



## IO-Link Interface Description

34D Allfluid 0/600 analogue

EN



## Table of Contents

---

1 Device variant	.....	3
2 Communication	.....	4
3 Parameter overview	.....	5
4 System Commands	.....	6
5 Identification	.....	7
6 Observation	.....	8
6.1 Process Data Input/Output	.....	8
7 Parameter	.....	9
7.1 Output configuration	.....	9
7.2 Digital output 1	.....	9
7.2.1 Pressure	.....	9
7.3 Memory	.....	10
7.3.1 Pressure	.....	10
7.4 Damping	.....	10
7.5 Setting of the sensor display	.....	10
7.6 Colour frame	.....	11
7.6.1 Colour frame	.....	11
7.7 Setup	.....	11
8 Diagnosis	.....	13
8.1 Diagnosis	.....	13
8.1.1 Pressure	.....	14
9 Events	.....	15
10 Error types	.....	16
11 Unit conversion	.....	17

## 1 Device variant

---

<p><b>34D Allfluid 0/600 analogue</b></p> <p>Electronic pressure sensor, 34D allfluid pressure switch; 0...600bar; output: 1 x digital + 1 x analogue 4...20mA / 0...10V</p>		
--	---	---

## 2 Communication

---

Vendor ID	0x03AE 942 d / Bytes 3d 174d
Device ID	0x0008014 32788 d / Bytes 128d 20d
Bit rate	COM2
Minimum cycle time	3 ms
SIO mode supported	Yes
Block parameterization	Yes
Data storage	Yes
Supported profiles	Measuring Sensor Identification and Diagnosis
Support of IO-Link 1.0	Yes



**NOTE:**

If the Vendor ID and Device ID is referenced in your PLC system, then it is ensured that

- the connected Device type is correct
- the IO-Link datastorage is enabled
- your application is still able to work, even your Device has been exchanged with a successor model.



For process value update rate, as well as further information concerning sensor performance, see datasheet

### 3 Parameter overview

Parameter	Index	Subindex	Type	Factory setting
Device Access Locks	12		RecordT (16 Bit)	false
Vendor name	16		StringT (11 Byte)	IMI Norgren
Vendor text	17		StringT (21 Byte)	www.imi-precision.com
Product Name	18		StringT (27 Byte)	34D Allfluid 0/600 analogue
Product ID	19		StringT (16 Byte)	34D-P600G-DA1-AA
Product Text	20		StringT (28 Byte)	allfluid 34D pressure switch
Serial Number	21		StringT (12 Byte)	
Hardware Version	22		StringT (2 Byte)	
Firmware Version	23		StringT (5 Byte)	
Application Specific Tag	24		StringT (32 Byte)	***
Function Tag	25		StringT (32 Byte)	***
Location Tag	26		StringT (32 Byte)	***
Device Status	36		UIntegerT (8 Bit)	0 (Device is OK)
Detailed Device Status	37		OctetStringT (3 byte) [8]	0x00,0x00,0x00
Process data input	40		RecordT (32 Bit)	
dAP	510		UIntegerT (16 Bit)	60
dAA	512		UIntegerT (16 Bit)	0
Active Events	545		RecordT (32 Bit)	
Param configuration fault	546		UIntegerT (32 Bit) [10]	0 (OK)
Loc	550		UIntegerT (8 Bit)	1 (uLoc)
uni	551		UIntegerT (8 Bit)	1 (bar)
diS	552		RecordT (16 Bit)	
coLr	554		UIntegerT (8 Bit)	2 (rEd / Displayed value red)
cFL	555		IntegerT (16 Bit)	0
cFH	556		IntegerT (16 Bit)	6000
Hi	560		IntegerT (16 Bit)	
Lo	561		IntegerT (16 Bit)	
ou1	580		UIntegerT (8 Bit)	3 (Hno / Hysteresis fct normally open)
dS1	581		UIntegerT (16 Bit)	0
dr1	582		UIntegerT (16 Bit)	0
SP1 / FH1 - PRES	583		IntegerT (16 Bit)	1500
rP1 / FL1 - PRES	584		IntegerT (16 Bit)	1380
ou2	590		UIntegerT (8 Bit)	1 (I / Analog signal 4...20 mA)
HIPS	5003		IntegerT (16 Bit)	6000
HIPC	5004		UIntegerT (32 Bit)	
MDC Descr	16512		RecordT (88 Bit)	
Lower limit	16512	1	IntegerT (32 Bit)	0 (0)
Upper limit	16512	2	IntegerT (32 Bit)	6000 (6000)
Unit code	16512	3	UIntegerT (16 Bit)	1130 (Pa)
Scale	16512	4	IntegerT (8 Bit)	4 (4)

## 4 System Commands

---



System Command information  
 - Address: Index 2, Subindex 0  
 - Datatype: UInteger (8 Bit)  
 - AccessRight: Write Only

System Commands	Text	Description
1	Upload Start	Start block parameter upload
2	Upload End	End block parameter upload
3	Download Start	Start block parameter download
4	Download End	Stop block parameter download
5	Store	Finalize block parameterization and start Data Storage
6	Break	Cancel block parameterization
130	Restore Factory Settings	
161	Reset [Hi] and [Lo] memory	
162	Reset [Lo] memory	
163	Reset [Hi] memory	
222	Flash On	
223	Flash Off	
240	IO-Link 1.1 system test command 240, Event 8DFE appears	
241	IO-Link 1.1 system test command 241, Event 8DFE disappears	
242	IO-Link 1.1 system test command 242, Event 8DFF appears	
243	IO-Link 1.1 system test command 243, Event 8DFF disappears	

## 5 Identification

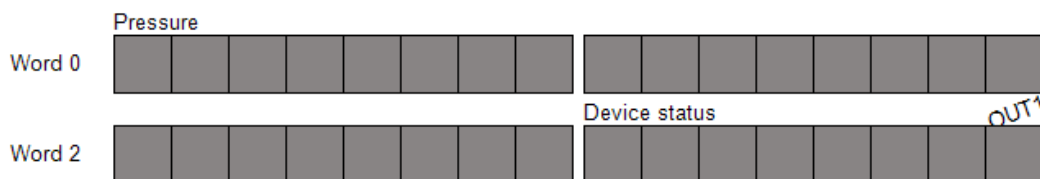
---

<b>Vendor name</b> Factory setting	<b>Index 16</b> IMI Norgren	<b>Subindex 0</b>	<b>StringT (11 Byte)</b>	<b>ReadOnly</b>
<b>Vendor text</b> Factory setting	<b>Index 17</b> www.imi-precision.com	<b>Subindex 0</b>	<b>StringT (21 Byte)</b>	<b>ReadOnly</b>
<b>Product Name</b> Factory setting	<b>Index 18</b> 34D Allfluid 0/600 analogue	<b>Subindex 0</b>	<b>StringT (27 Byte)</b>	<b>ReadOnly</b>
<b>Product Text</b> Factory setting	<b>Index 20</b> allfluid 34D pressure switch	<b>Subindex 0</b>	<b>StringT (28 Byte)</b>	<b>ReadOnly</b>
<b>Product ID</b> Factory setting	<b>Index 19</b> 34D-P600G-DA1-AA	<b>Subindex 0</b>	<b>StringT (16 Byte)</b>	<b>ReadOnly</b>
<b>Serial Number</b>	<b>Index 21</b>	<b>Subindex 0</b>	<b>StringT (12 Byte)</b>	<b>ReadOnly</b>
<b>Hardware Version</b>	<b>Index 22</b>	<b>Subindex 0</b>	<b>StringT (2 Byte)</b>	<b>ReadOnly</b>
<b>Firmware Version</b>	<b>Index 23</b>	<b>Subindex 0</b>	<b>StringT (5 Byte)</b>	<b>ReadOnly</b>
<b>Application Specific Tag</b> Factory setting	<b>Index 24</b> ***	<b>Subindex 0</b>	<b>StringT (32 Byte)</b>	<b>ReadWrite</b>
<b>Function Tag</b> Plant designation, describes the device functionality Factory setting	<b>Index 25</b> ***	<b>Subindex 0</b>	<b>StringT (32 Byte)</b>	<b>ReadWrite</b>
<b>Location Tag</b> Location designation, identifies the device location Factory setting	<b>Index 26</b> ***	<b>Subindex 0</b>	<b>StringT (32 Byte)</b>	<b>ReadWrite</b>

## 6 Observation

### 6.1 Process Data Input/Output

Process data input	Index 40	Subindex 0	RecordT (32 Bit)
Pressure			IntegerT (16 Bit)
Current pressure			
Value range [bar]	(0 To 6300) * 0.1 32760 32764	(OL) (NoData)	
Device status			UIntegerT (4 Bit)
Current device status, a copy of the parameter [Device Status, Index 36] in the process data channel			
Value range	0 1 2 3 4	(Device is OK) (Maintenance required) (Out of specification) (Functional check) (Failure)	
OUT1			BooleanT
Current status of the digital signal [OUT1]			
Value range	false true	(OFF) (On)	



Process data displayed according device sort order.  
Please note: Siemens PLCs swap the high and low byte when using byte addressing.



## 7 Parameter

### 7.1 Output configuration

ou1	Index 580	Subindex 0	UIntegerT (8 Bit)	ReadWrite
Output configuration [OUT 1]				
<b>Factory setting</b>	<b>3</b>	<b>(Hno / Hysteresis fct normally open)</b>		
Value range	3	(Hno / Hysteresis fct normally open)		
	4	(Hnc / Hysteresis fct normally closed)		
	5	(Fno / Window fct normally open)		
	6	(Fnc / Window fct normally closed)		
	16	(OFF / Output Off)		

ou2	Index 590	Subindex 0	UIntegerT (8 Bit)	ReadWrite
Output configuration [OUT 2]				
<b>Factory setting</b>	<b>1</b>	<b>(I / Analog signal 4...20 mA)</b>		
Value range	1	(I / Analog signal 4...20 mA)		
	2	(U / Analog signal 0...10 V)		
	16	(OFF / Output Off)		

### 7.2 Digital output 1

dS1	Index 581	Subindex 0	UIntegerT (16 Bit)	ReadWrite
Switching delay for [OUT 1]				
<b>Factory setting</b>	<b>0</b>			
Value range [s]	(0 To 500) * 0.1			

dr1	Index 582	Subindex 0	UIntegerT (16 Bit)	ReadWrite
Reset delay for [OUT 1]				
<b>Factory setting</b>	<b>0</b>			
Value range [s]	(0 To 500) * 0.1			

#### 7.2.1 Pressure

SP1 / FH1 - PRES	Index 583	Subindex 0	IntegerT (16 Bit)	ReadWrite
Switch point 1 / Pressure, [SP1] must be greater than [rP1]. Please take into account the current [rP1] value. [SP1] will be refused if below [rP1]. [SP] = [FH] and [rP] = [FL] if [OU1] = Fno, Fnc. ! Rounded on stepwidth !				
<b>Factory setting</b>	<b>1500</b>			
Value range [bar]	(32 To 6000) * 0.1			

rP1 / FL1 - PRES	Index 584	Subindex 0	IntegerT (16 Bit)	ReadWrite
Reset point 1 / Pressure, [rP1] must be smaller than [SP1]. Please take into account the current [SP1] value. [rP1] will be refused if above [SP1]. [rP] = [FL] and [SP] = [FH] if [OU1] = Fno, Fnc. ! Rounded on stepwidth !				
<b>Factory setting</b>	<b>1380</b>			
Value range [bar]	(18 To 5986) * 0.1			

## 7 Parameter

### 7.3 Memory

#### 7.3.1 Pressure

Lo	Index 561	Subindex 0	IntegerT (16 Bit)	ReadOnly
Minimum memory value				
Value range [bar]	(0 To 6300) * 0.1 32760 32764	(OL) (NoData)		

Hi	Index 560	Subindex 0	IntegerT (16 Bit)	ReadOnly
Maximum memory value				
Value range [bar]	(0 To 6300) * 0.1 32760 32764	(OL) (NoData)		

### 7.4 Damping

dAP	Index 510	Subindex 0	UIntegerT (16 Bit)	ReadWrite
Damping of the measured signal				
<b>Factory setting</b> Value range [s]	<b>60</b> (0 To 4000) * 0.001			

dAA	Index 512	Subindex 0	UIntegerT (16 Bit)	ReadWrite
Response time between process value change and change of the analog output				
<b>Factory setting</b> Value range [s]	<b>0</b> (0 To 4000) * 0.001			

### 7.5 Setting of the sensor display

diS	Index 552	Subindex 0	RecordT (16 Bit)	ReadWrite
Display settings				
Display On / OFF		bitOffset 7	BooleanT	
<b>Factory setting</b> Value range	<b>false</b> false true	(On) (On) (OFF)		
Display orientation		bitOffset 6	BooleanT	
<b>Factory setting</b> Value range	<b>false</b> false true	(Not rotated) (Not rotated) (Rotated 180°)		
Update rate		bitOffset 0	UIntegerT (6 Bit)	
<b>Factory setting</b> Value range	<b>2</b> 1 2 4	(d2 / medium) (d1 / fast) (d2 / medium) (d3 / slow)		

## 7 Parameter

coLr	Index 554	Subindex 0	UIntegerT (8 Bit)	ReadWrite
Colour configuration of the display				
<b>Factory setting</b>	<b>2</b>	<b>(rEd / Displayed value red)</b>		
Value range	2	(rEd / Displayed value red)		
	3	(GrEn / Displayed value green)		
	4	(r1ou / Displayed value red when OUT1 switches)		
	5	(G1ou / Displayed value green when OUT1 switches)		
	10	(r-cF / Displayed value red when the measured value is inside the limits of [cFL] and [cFH])		
	11	(G-cF / Displayed value green when the measured value is inside the limits of [cFL] and [cFH])		

uni	Index 551	Subindex 0	UIntegerT (8 Bit)	ReadWrite
Selection of the physical unit				
<b>Factory setting</b>	<b>1</b>	<b>(bar)</b>		
Value range	0	(MPa)		
	1	(bar)		
	2	(psi)		

Loc	Index 550	Subindex 0	UIntegerT (8 Bit)	ReadWrite
[Loc] locks the local user interface to prevent unintentional changes, [Loc] is resettable at the device				
<b>Factory setting</b>	<b>1</b>	<b>(uLoc)</b>		
Value range	0	(Loc)		
	1	(uLoc)		

### 7.6 Colour frame

#### 7.6.1 Colour frame

cFH	Index 556	Subindex 0	IntegerT (16 Bit)	ReadWrite
Upper value for colour change. Parameter only active if coLr = [r-cF] or [G-cF]. The setting range is limited to its minimum by [cFL]. ! Rounded on stepwidth !				
<b>Factory setting</b>	<b>6000</b>			
Value range [bar]	(18 To 6000) * 0.1			

cFL	Index 555	Subindex 0	IntegerT (16 Bit)	ReadWrite
Lower value for colour change. Parameter only active if coLr = [r-cF] or [G-cF]. The setting range is limited to its maximum by [cFH]. ! Rounded on stepwidth !				
<b>Factory setting</b>	<b>0</b>			
Value range [bar]	(0 To 5982) * 0.1			

### 7.7 Setup

Device Access Locks	Index 12	Subindex 0	RecordT (16 Bit)	ReadWrite
Local User Interface Lock		bitOffset 3	BooleanT	
<b>Factory setting</b>	<b>false</b>			
MDC Descr	Index 16512	Subindex 0	RecordT (88 Bit)	ReadOnly
Description of the measurement data channel				

## 7 Parameter

MDC Descr	Index 16512	Subindex 0	RecordT (88 Bit)	ReadOnly
Lower limit		Subindex 1	IntegerT (32 Bit)	
Lower value measurement range				
<b>Factory setting</b>	<b>0</b>	<b>(0)</b>		
Value range	0	(0)		
Upper limit		Subindex 2	IntegerT (32 Bit)	
Upper value measurement range				
<b>Factory setting</b>	<b>6000</b>	<b>(6000)</b>		
Value range	6000	(6000)		
Unit code		Subindex 3	UIntegerT (16 Bit)	
Unit code of the measurement data				
<b>Factory setting</b>	<b>1130</b>	<b>(Pa)</b>		
Value range	1130	(Pa)		
Scale		Subindex 4	IntegerT (8 Bit)	
Range shifting (10 scale)				
<b>Factory setting</b>	<b>4</b>	<b>(4)</b>		
Value range	4	(4)		

## 8 Diagnosis

### 8.1 Diagnosis

Device Status	Index 36	Subindex 0	UIntegerT (8 Bit)	ReadOnly
<b>Factory setting</b>	<b>0</b>	<b>(Device is OK)</b>		
Value range	0	(Device is OK)		
	1	(Maintenance required)		
	2	(Out of specification)		
	3	(Functional check)		
	4	(Failure)		
	(5 To 255) (Reserved)			

Detailed Device Status	Index 37	Subindex 0	OctetStringT (3 byte) [8]	ReadOnly
<b>Factory setting</b>	<b>0x00,0x00,0x00</b>			

Active Events	Index 545	Subindex 0	RecordT (32 Bit)	ReadOnly
Bit mask for current pending events				
Bit_31		bitOffset 31	BooleanT	
Test Event 2. Device Status = 1 (Maintenance required)				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x8DFF)		
Bit_30		bitOffset 30	BooleanT	
Test Event 1. Device Status = 1 (Maintenance required)				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x8DFE)		
Bit_29		bitOffset 29	BooleanT	
Flash sequence active. Device Status = 1 (Maintenance required)				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x8CDB)		
Bit_9		bitOffset 9	BooleanT	
Process variable range under-run				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x8C30)		
Bit_8		bitOffset 8	BooleanT	
Process variable range over-run				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x8C10)		
Bit_2		bitOffset 2	BooleanT	
Short circuit				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x7710)		
Bit_1		bitOffset 1	BooleanT	
Parameter error				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x6320)		

## 8 Diagnosis

Active Events	Index 545	Subindex 0	RecordT (32 Bit)	ReadOnly
Bit_0		bitOffset 0	BooleanT	
Device hardware fault				
<b>Factory setting</b>	<b>0</b>	<b>(noEv)</b>		
Value range	0	(noEv)		
	1	(0x5000)		

Param configuration fault	Index 546	Subindex 0	UIntegerT (32 Bit) [10]	ReadOnly
Displays the incorrectly set parameters				
<b>Factory setting</b>	<b>0</b>	<b>(OK)</b>		
Value range	0	(OK)		
	786432	(Device Access Locks, Index = 12)		
	38207488	(SP1 / FH1 - PRES, Index = 583)		
	38273024	(rP1 / FL1 - PRES, Index = 584)		
	38010880	(ou1, Index = 580)		
	38666240	(ou2, Index = 590)		
	38076416	(dS1, Index = 581)		
	38141952	(dr1, Index = 582)		
	36110336	(uni, Index = 551)		
	33423360	(dAP, Index = 510)		
	33554432	(dAA, Index = 512)		
	36306944	(coLr, Index = 554)		
	36438016	(cFH, Index = 556)		
	36372480	(cFL, Index = 555)		
	36175872	(diS, Index = 552)		
	36044800	(Loc, Index = 550)		
	327876608	(HIPS, Index = 5003)		

### 8.1.1 Pressure

HIPC	Index 5004	Subindex 0	UIntegerT (32 Bit)	ReadOnly
Pressure overload counter				
Value range	(0 To 4294967295)			

HIPS	Index 5003	Subindex 0	IntegerT (16 Bit)	ReadWrite
Configuration of pressure overload counter switch point				
<b>Factory setting</b>	<b>6000</b>			
Value range [bar]	(0 To 6000) * 0.1			

## 9 Events

Code	Device status	PQ*	Class	Name	Description
0x5000 20480d	4 (Failure)	invalid	Error	Device hardware fault	Device Exchange
0x6320 25376d	3 (Functional check)	invalid	Error	Parameter error	Check data sheet and values
0x7710 30480d	3 (Functional check)	valid	Error	Short circuit	Check installation
0x8C10 35856d	2 (Out of specification)	valid	Warning	Process variable range over-run	Process data uncertain
0x8C30 35888d	2 (Out of specification)	valid	Warning	Process variable range under-run	Process data uncertain
0x8CDB 36059d	1 (Maintenance required)	valid	Warning	Flash sequence active. Device Status = 1 (Maintenance required)	Deactivate flash sequence
0x8DFE 36350d	1 (Maintenance required)	valid	Warning	Test Event 1. Device Status = 1 (Maintenance required)	Event appears by setting index 2 to value 240, Event disappears by setting index 2 to value 241
0x8DFF 36351d	1 (Maintenance required)	valid	Warning	Test Event 2. Device Status = 1 (Maintenance required)	Event appears by setting index 2 to value 242, Event disappears by setting index 2 to value 243



Events are raised by the device itself to notify irregular device states  
PQ\* = Process data quality

## 10 Error types

Code	Name	Description
0x8000 32768d	Device application error - no details	Service has been refused by the device application and no detailed information of the incident is available
0x8011 32785d	Index not available	Access occurs to a not existing index
0x8012 32786d	Subindex not available	Access occurs to a not existing subindex
0x8020 32800d	Service temporarily not available	Parameter is not accessible due to the current state of the device application
0x8021 32801d	Service temporarily not available - local control	Parameter is not accessible due to an ongoing local operation at the device
0x8022 32802d	Service temporarily not available - device control	Parameter is not accessible due to a remote triggered state of the device application
0x8023 32803d	Access denied	Write access on a read-only parameter
0x8030 32816d	Parameter value out of range	Written parameter value is outside its permitted value range
0x8033 32819d	Parameter length overrun	Written parameter length is above its predefined length
0x8034 32820d	Parameter length underrun	Written parameter length is below its predefined length
0x8035 32821d	Function not available	Written command is not supported by the device application
0x8036 32822d	Function temporarily unavailable	Written command is not available due to the current state of the device application
0x8040 32832d	Invalid parameter set	Written single parameter collides with other actual parameter settings
0x8041 32833d	Inconsistent parameter set	Parameter inconsistencies were found at the end of block parameter transfer, device plausibility check failed
0x8082 32898d	Application not ready	Read or write service is refused due to a temporarily unavailable application



Error types are used for the ISDU response. Values unequal '0' indicate the cause of a failed ISDU read or write service.



## 11 Unit conversion

---



This list provides conversion formulas to convert the transmitted IO-Link raw data into physical units.

Value in [bar]	= Transmitted value	* 0.1
Value in [psi]	= Transmitted value	* 1.450377
Value in [MPa]	= Transmitted value	* 0.01