

KIP Fluid Control Valves - Series 6



- > 2/2 and 3/2 direct acting
- > Designed for long life and reliability
- > Ideally suited for air, liquid, and vacuum control in a broad range of sectors
- > Different materials available for compatibility with neutral gases and liquids
- > Custom fitting or electrical hardware installation available upon request



Specifications

Operating Pressure:

2/2: 0 to 1000 psig, vacuum capable*

3/2: 0 to 250 psig, vacuum capable*

Orifice

2/2: Ø3/32" to Ø1/4" (2/2)

3/2: Ø5/64" to Ø1/4" (3/2)

MOPD:

2/2: 15 - 300 psig

3/2: 5 - 100 psig

Cv Range:

2/2: 0.185 to 0.450

3/2: 0.145 to 0.415

Actuation:

Solenoid

Coil:

AC, DC, rectified coil*

Coil Class Options:

B: 266°F (130°C) standard

H: 356°F (180°C)

Connection:

2/2: 1/8" NPTF, 1/4" NPTF,

3/8" NPTF, manifold mount

3/2: 1/8" NPTF, 1/4" NPTF,

manifold mount

Electrical Connection

24" flying leads or 1/4" spade terminal

Switching Function:

2/2: NO, NC

3/2: NO, NC, Multi-purpose, Directional Control

Voltage Options:

12VDC, 24VDC, 24/60VAC,

120/60VAC, 240/60VAC

Wattage:

10 Watts, nominal

Duty Cycle:

Continuous

Response Time:

9ms, typical

Weight:

15oz, typical


Material:

Body: brass or stainless steel

Internal wetted parts: 430FR &


300 series CRES

*For vacuum ratings and rectified coil options, call technical support at 860-677-0272 or email: farmingtontechnical@imi-precision.com

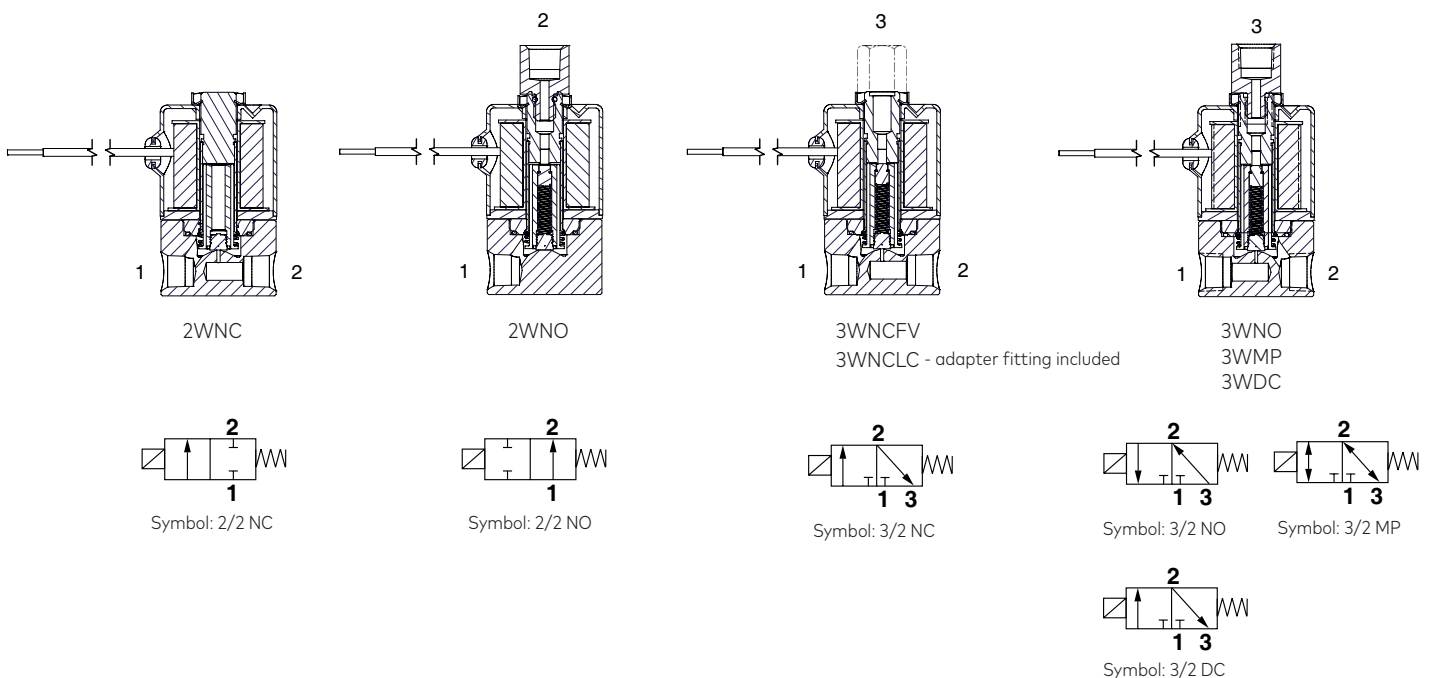

Standard Valve Selection

Series 6 - Valve Configurator

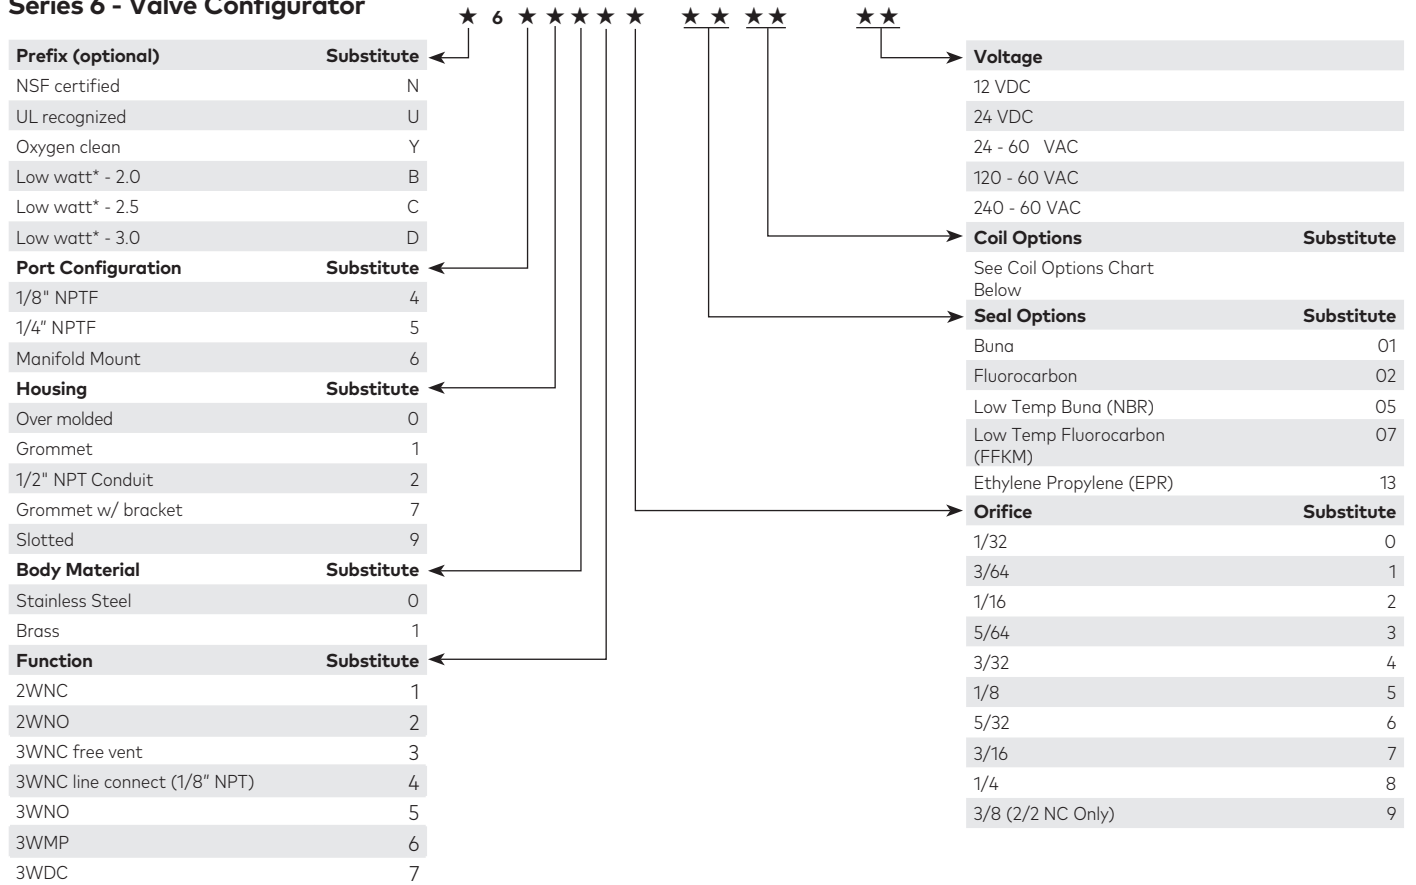

Coil Options

Number	Housing	Type	Class
01	1 - Grommet	Standard - dry tape wrapped with leads	B
01	2 - Conduit	Standard - dry tape wrapped with leads	B
41	1 - Grommet	Free-standing molded with leads	B
41	2 - Conduit	Free-standing molded with leads	B
51	9 - Slotted	1/4" Vertical Spade	B
68	0 - Over molded	1/2" NPT integrated conduit over molded with leads	H
69	0 - Over molded	Integrated over molded DIN coil	H

*For class H coils replace second digit with 3.
Example: 43 = Class H Free-standing molded with leads

Series 6 - 2/2 NC Cv and MOPD Values

Orifice Diameter		MOPD (psi)	Cv Value	Part Numbering
Body	Stop			
1/32		1200	0.035	6***10
3/64		1000	0.050	6***11
1/16		500	0.095	6***12
5/64		300	0.140	6***13
3/32		200	0.200	6***14
1/8		150	0.295	6***15
5/32		110	0.370	6***16
3/16		60	0.435	6***17
1/4		30	0.610	6***18
3/8		5	0.900	6***19

Series 6 - 2/2 NO Cv and MOPD Values

Orifice Diameter		MOPD (psi)	Cv Value	Part Numbering
Body	Stop			
	1/32	1000	0.035	6***20
	3/64	600	0.050	6***21
	1/16	350	0.095	6***22
	5/64	250	0.140	6***23
	3/32	175	0.200	6***24
	1/8	100	0.295	6***25

Series 6 - 3/2 NC Cv and MOPD Values

Orifice Diameter		MOPD (psi)	Cv Value Body	Cv Value Endstop	Part Numbering
Body	Stop				
1/32	1/32	300	0.035	0.025	6***40
3/64	3/64	250	0.050	0.065	6***41
1/16	1/16	200	0.090	0.115	6***42
5/64	5/64	175	0.135	0.180	6***43
3/32	3/32	125	0.180	0.210	6***44
1/8	1/8	85	0.275	0.240	6***45
5/32	1/8	50	0.370	0.240	6***46
3/16	1/8	30	0.455	0.240	6***47
1/4	1/8	15	0.650	0.240	6***48

Series 6 - 3/2 NO Cv and MOPD Values

Orifice Diameter		MOPD (psi)	Cv Value Body	Cv Value Endstop	Part Numbering
Body	Stop				
1/32	1/32	400	0.035	0.025	6***50
3/64	3/64	250	0.050	0.065	6***51
1/16	1/16	200	0.090	0.115	6***52
5/64	5/64	175	0.135	0.180	6***53
3/32	3/32	125	0.180	0.210	6***54
1/8	1/8	85	0.275	0.240	6***55
5/32	1/8	50	0.370	0.240	6***56
3/16	1/8	35	0.455	0.240	6***57
1/4	1/8	15	0.650	0.240	6***58


For free vent, change fifth digit from 4 to 3

Series 6 - 3/2 MP Cv and MOPD Values

Orifice Diameter		MOPD (psi)	Cv Value Body	Cv Value Endstop	Part Numbering
Body	Stop				
1/32	1/32	275	0.035	0.025	6***60
3/64	3/64	200	0.050	0.065	6***61
1/16	1/16	175	0.090	0.115	6***62
5/64	5/64	125	0.135	0.180	6***63
3/32	3/32	100	0.180	0.210	6***64
1/8	1/8	60	0.275	0.240	6***65
5/32	1/8	40	0.370	0.240	6***66
3/16	1/8	25	0.455	0.240	6***67
1/4	1/8	15	0.650	0.240	6***68

Series 6 Dimensions


Dimensions in mm
Projection/Third angle

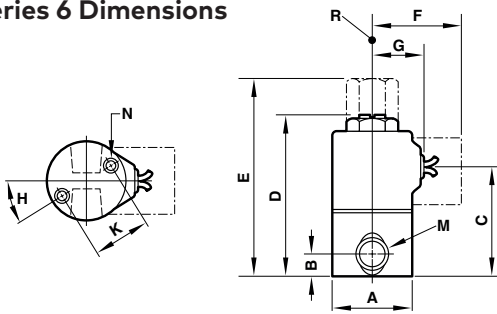

Standard Valve

A	B	C	D	E	F	G	H	K	M	N	R
1.62 (41)	.344 (9)	G-2.04 (52) C-1.87 (48)	2.86 (73)	3.54 (90)	1.58 (40)	1.03 (26)	45°	1.24 (31)	1/8-27 NPTF or 1/4-18 NPTF	#10-32 UNF x 5/16 MFT	1/8-2 NPTF or 1/4-18 NPTF


Mounting Brackets

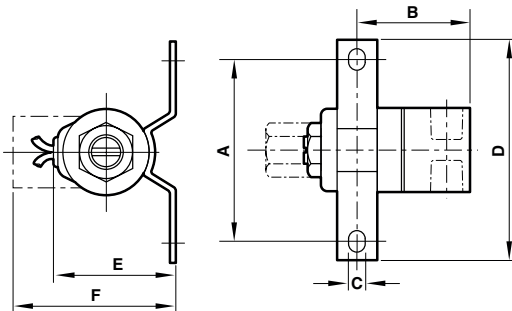

Bracket Dimensions

A	B	C	D	E	F
2.13 (54)	1.97 (50)	.20 (5)	2.63 (67)	2.15 (55)	2.68 (68)

Mounting Brackets

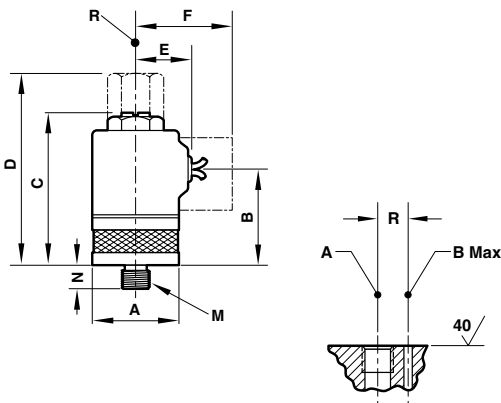

Manifold Mount Valve

A	B	C	D	E	F	M	N	R
1.62 (41)	G- 1.73 (44) C- 1.56 (40)	2.55 (65)	3.23 (82)	1.03 (26)	1.58 (40)	1/2 20 UNF	.31 (8)	1/8-27 NPTF or 1/4-18 NPTF

Manifold Mount Interface

A	B	R
1/2 - 20 UNF-2B x .32 MFT	.27 (7)	.51 (13)

NOTE: A is underseat connection** B is overseat connection***