

KA/802000/M/EX

Stainless Steel ISOLine™ 15552 cylinder, double acting

- ø 32 ... 200 mm
- High performance adaptive cushioning system "ACS"
- High corrosion and acid resistance
- These cylinder are applicable in zone 1 & 2 (gas), 21 & 22 (dust), ATEX Cat. II 2G and II 2D.



Technical features

Medium:
Compressed air, filtered, lubricated or non-lubricated

Standard:
ISO 15552

Operation:
Double acting, adjustable cushioning

Operating pressure:
ø 32 ... 200 mm
Cylinder with Round barrel
1 ... 10 bar (14 ... 145 psi)

Ports:
G1/8 ... 3/4

Cylinder diameters:
32, 40, 50, 63, 80, 100, 125, 160, 200 mm

Standard strokes:
25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500 mm

Non-standard strokes:
ø 32 ... 125 mm (5 ... 2800 mm)
ø 160 ... 200 mm (5 ... 2600 mm)

ATEX marking:
II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T120 °C Db

Operating temperature:
Standard version
ø 32 ... 200 mm
-10 ... +80 °C max. (+14 ... +176 °F)

Ambient temperature:
Standard version
ø 32 ... 200 mm
-10 ... +60 °C max. (-4 ... +140 °F)
Air supply must be dry enough to avoid ice formation at temperatures below +2 °C (+35 °F).


Standard Materials:
Barrel: X5 Cr Ni 18 10 (1.4301; AISI 304)
End covers: X5 Cr Ni 19 10 (1.4308; AISI 304)
Piston rod: X10 Cr Ni S 18 9 (1.4305; AISI 303)
Nuts and screws: X10 Cr Ni S 18 9 (1.4305; AISI 303)
Tie rods: X5 Cr Ni 18 10 (1.4301; AISI 304)
Piston rod seals: FPM
Piston seals: PUR ø 32 ... 125 mm, NBR ø 160 ... 200 mm
Cushion seals: NBR
O-rings: FPM

Technical data

Cylinder ø (mm)	32	40	50	63	80	100	125	160	200
Port size	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2	G1/2	G3/4	G3/4
Piston rod ø (mm)	12	16	20	20	25	25	32	40	40
Piston rod thread	M10 x 1,25	M12 x 1,25	M16 x 1,5	M16 x 1,5	M20 x 1,5	M20 x 1,5	M27 x 2	M36 x 2	M36 x 2
Cushion length (mm)	20	22	24	24	26	33	39	43	43
Cushioning									
Adaptive cushioning systems "ACS"	•	•	•	•	•	•	•		
Cushioning (adjustable cushion)								•	•
Initial cushion volume (cm ³)	12,8	20,2	36	64	111	235	427	784	1273
Theoretical thrusts at 6 bar outstroke (N)	482	754	1178	1870	3016	4710	7363	12064	18840
Theoretical thrusts at 6 bar instroke (N)	414	633	990	1680	2722	4416	6882	11310	18090
Air consumption at 6 bar outstroke (l/cm)	0,056	0,088	0,137	0,218	0,35	0,55	0,86	1,41	2,2
Air consumption at 6 bar instroke (l/cm)	0,048	0,074	0,114	0,195	0,32	0,51	0,79	1,32	2,1

The function

The new "ACS" Adaptive Cushioning System provides a high performance pneumatic damping function. The system will automatically cushion for a wide range of general applications as delivered. Manual adjustment is still possible for extreme applications.

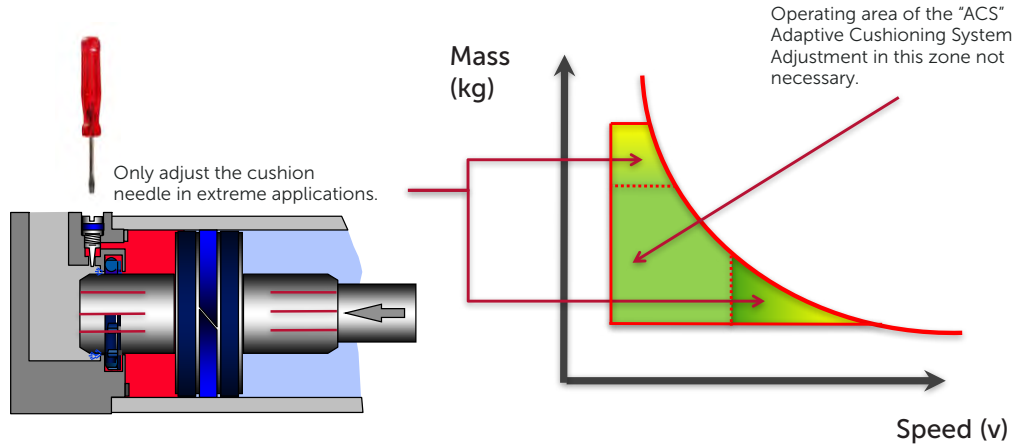

Design and sizing in pneumatics

Golden rules

Design and sizing in pneumatics is often based upon experience coupled with an element of fear of under specifying crucial equipment. In an attempt to ensure enough power, engineers may select over sized cylinders and then select over sized valves to supply them with enough air. The same uncertainty can also lead to over sized specification of air line equipment, fittings and tubing. The outcome is components larger than necessary that use too much compressed air and waste energy and money. However when following some well proven golden rules and a few laws of pneumatics it is easy to achieve correctly sized pneumatic installations.

Sizing rule

The theoretical force of the cylinder should be 25% extra for high speed, 50% extra for low speed and 100% extra for ultra low speed (positioning) applications.


The correct sizing is based upon the required force and applied pressure. Go to page 1 for more information on cylinder sizing and air consumption.

Basics to consider

The force required, the pressure available, the speed of movement and air consumption. ISO and VDMA standard or compact style also cushioning and sensors. Cylinders are greased on assembly and operate under normal conditions without additional lubrication. However using a lubricator will extend the life of these products.

Load and buckling

For applications with high side loading, use pneumatic slide actuators or standard cylinders fitted with guide units. Alternatively external guide bearings should be installed. When a long stroke length is specified, care must be taken to ensure the rod length is within the limits for prevention of buckling. The table shows the maximum stroke length for a variety of installation arrangements.

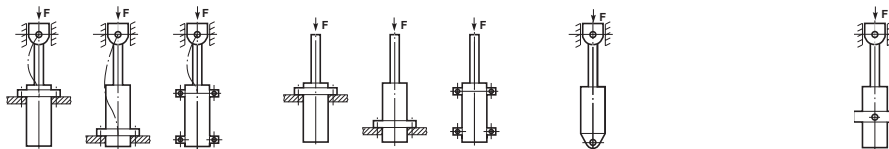

Cylinder ø (mm)	Piston rod ø (mm)	Load case 1 Pressure (bar)				Load case 2 Pressure (bar)				Load case 3 Pressure (bar)				Load case 4 Pressure (bar)			
		4	6	10	16	4	6	10	16	4	6	10	16	4	6	10	16
32	12	1100	860	650	500	500	390	290	210	650	520	380	290	760	600	450	340
40	16	1600	1200	950	730	730	580	430	320	940	750	560	430	1100	880	660	500
50	20	2000	1600	1200	930	930	740	550	420	1200	960	720	550	1400	1100	840	640
63	20	1500	1200	930	720	720	570	420	310	930	740	550	420	1100	860	650	490
80	25	1900	1500	1100	880	880	700	510	380	1100	910	680	510	1300	1100	800	600
100	25	1500	1200	880	670	670	520	380	270	880	690	510	370	1000	820	600	450
125	32	2000	1600	1200	910	910	710	520	380	1200	940	690	520	1400	1100	820	620
160	40	2400	1900	1500	1100	1100	880	640	480	1400	1200	860	640	1700	1400	1000	760
200	40	1900	1500	1100	860	860	670	480	350	1100	890	650	480	1300	1000	770	580

Explosion protection according ATEX directive 2014/34/EU EN ISO 80079 Non-electrical equipment for potentially explosive atmospheres





Range of application		All range of application other than mines		
Equipment group		II		
Potentially explosive atmosphere (combustible materials)		Mixture of air and gases, vapours, mists G (gas) Dust/air - mixture D (dust)		
Probability risk for a potentially explosive atmosphere		Continuous or long-term or frequent	Occasional	Rarely and briefly
Equipment categories		1	2	3
Equipment safety		very high	high	normal
Gas	Equipment-identification Ex...	Ex II 1G	Ex II 2G	Ex II 3G
	ATEX-zone	Zone 0	Zone 1	Zone 2
Dust	Equipment-identification Ex...	Ex II 1D	Ex II 2D	Ex II 3D
	ATEX-zone	Zone 20	Zone 21	Zone 22

Equipment identification for Norgren pneumatic cylinder: (Example for standard cylinder)

 II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T120 °C Db

Equipment group:	II	All application other than mines
Equipment categorie:	2	High level of equipment safety
Usability for zones:	G and D	Gas and dust
Explosions groups	IIC and IIIC	Max. ignitability gas- and dust groups
Temperature class for gas:	T4	Max. surface temperature 135 °C
Temperature data for dust:	120 °C	Max. surface temperature
Equipment Protection Level (EPL)	Gb and Db	Gas and dust, save by normal operation and expected equipment fault





Additional ISO 15552 Cylinder ranges (Cylinder ranges in the red frame are shown in this data sheet.)

													
Symbols		Profile barrel	Round Barrel	Industrial Automation	Food & Beverage	Automotive	ATEX	Rail *1)	CE-marked	ø (mm)	Range	Description	Datasheet
		•	•	•	•		•	•	•	32 ... 125	PRA/802000 LPRA/802000	Double Acting Cylinder	1_5_220_PRA_802000_M_RA_8000_M 1_5_225_PRA_802000_M_EX 1_5_220_LPRA_802000_M_LRA_8000_M
		•	•		•		•	•	•	32 ... 125	RA/802000 LPRA/802000	Double Acting Cylinder	1_5_220_PRA_802000_M_RA_8000_M 1_5_225_PRA_802000_M_EX 1_5_220_LPRA_802000_M_LRA_8000_M
		•	•		•		•		•	160 ... 320	RA/8000	Double Acting Cylinder	1_5_220_PRA_802000_M_RA_8000_M 1_5_126_RA_8000_M_EX
		•	•		•			•			LRA/8000		1_5_220_LPRA_802000_M_LRA_8000_M
		•	•	•	•		•	•	•	32 ... 200	KA/802000	Stainless steel Cylinder	1_5_222_KA_802000_M 1_5_228_KA_802000_M_EX
		•	•	•			•		•	32 ... 100	PRA/822000	Smooth Line Cylinder	1_5_230_PRA_822000_M 1_5_235_PRA_822000_M_EX
		•	•	•			•		•	32 ... 100	PRA/842000	Clean Line Cylinder	1_5_240_PRA_842000_M 1_5_245_PRA_842000_M_EX
		•	•		•		•		•	32 ... 100	PRA/862000	IVAC Industrial Cylinder	1_5_250_PRA_862000_M 1_5_255_PRA_862000_M_EX
		•	•	•	•		•		•	32 ... 100	PRA/882000	IVAC Clean Line Cylinder	1_5_260_PRA_882000_M 1_5_265_PRA_882000_M_EX
		•	•	•	•		•		•	40 ... 125	PSA/802000/F1	Cylinder with position sensor	1_9_067_PSA_802000_F1 1_9_068_PSA_802000_F1_EX
		•	•		•		•		•	160 ... 320	SA/8000/F1	Cylinder with position sensor	1_9_062_SA_8000_F1 1_9_062_SA_8000_F1_EX
		•	•	•	•			•		32 ... 100	PRA/801000, PRA/803000	Standard Single Acting Cylinder	1_4_101_PRA_801000_803000 -
		•	•		•			•		32 ... 100	RA/801000, RA/803000	Standard Single Acting Cylinder	1_4_101_PRA_801000_803000 -

• Range available. For additional information please contact the technical service or <http://www.norgren.com>

*1) Rail Cylinder Shock and vibration tested to EN 61373 Category 1; Class A + B

Cylinder variants


Symbol Please see the description below	Versions		Piston Rod Material				Standard Model with		ø (mm)	Description	Page
	H	L	K	S	C	D	Male Piston Rod Thread	Female Piston Rod Thread			
			X				KA/802000/M/EX	KA/802000/MX/EX	32 ... 125	Standard Cylinder	8/9
			X				KA/802000/M/EX	-	160 ... 200	Standard Cylinder	8
			X				KA/802000/W2/EX	KA/802000/W2X/EX	32 ... 125	Cylinder with Special Wiper - Seal (suitable for appl. with cement, plaster (stucco), arizona sand, hoar-frost or ice)	8/9
			X				KA/802000/W2/EX	-	160 ... 200		
			X				KA/802000/MU/EX	KA/802000/MUX/EX	32 ... 125	Cylinder with Extended Piston Rod ø 32 ... 125 mm (Stroke + Extension = 2800 mm) ø 160 ... 320 mm (Stroke + Extension = 2600 mm)	8/9
			X				KA/802000/MU/EX	-	160 ... 200		
			X				KA/802000/W6/EX	KA/802000/W6X/EX	32 ... 125	Cylinder with Special wiper seal suitable for appl. with cement, plaster (stucco), arizona sand, hoar-frost or ice	8/9
			X				KA/802000/W6/EX	-	160 ... 200		
			X				KA/802000/MW/EX	KA/802000/MWX/EX	32 ... 125	Cylinder without Cushioning	8/9
			X				KA/802000/MW/EX	-	160 ... 200		
			X				KA/802000/JM/EX	KA/802000/JMX/EX	32 ... 125	Cylinder with Double Ended Piston Rod	9
			X				KA/802000/JM/EX	-	160 ... 200		
			X				KA/802000/W4/EX	KA/802000/W4X/EX	32 ... 125	Cylinder with Double Ended Piston Rod and Special wiper seal suitable for appl. with cement, plaster (stucco), arizona sand, hoar-frost or ice	8/9
			X				KA/802000/W4/EX	-	160 ... 200		

Note: K, S = Stainless steel austenitic; X = Standard;

Option selector

Piston rod material	Substitute																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				</
---------------------	------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

Cylinder with Round barrel $\varnothing$ 32 ... 200 mm

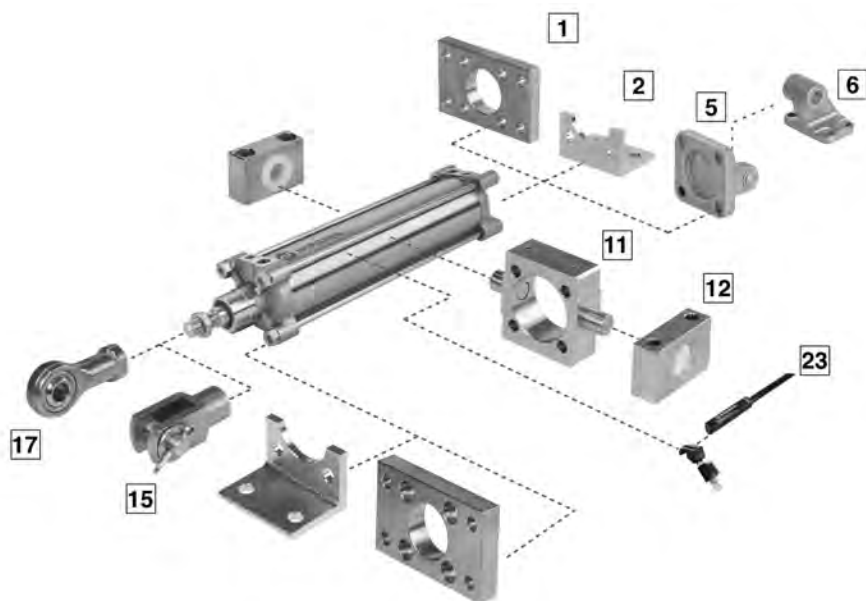

Mountings

	B, G	C	D	F	S	SW	UF	UH
								
Cyl. $\varnothing$	1 Page 10	2 Page 10	5 Page 10	15 Page 10	12 Page 11	6 Page 11	17 Page 11	11 Page 11
32	KQA/8032/22	KQA/8032/21	KQA/8032/23	KQM/55433/25	KQA/8032/41	M/P72288	KQM/8032/32	KQA/8032/40
40	KQA/8040/22	KQA/8040/21	KQA/8040/23	KQM/55441/25	KQA/8040/41	M/P72289	KQM/8040/32	KQA/8040/40
50	KQA/8050/22	KQA/8050/21	KQA/8050/23	KQM/55451/25	KQA/8040/41	M/P72290	KQM/8050/32	KQA/8050/40
63	KQA/8063/22	KQA/8063/21	KQA/8063/23	KQM/55451/25	KQA/8063/41	M/P72291	KQM/8050/32	KQA/8063/40
80	KQA/8080/22	KQA/8080/21	KQA/8080/23	KQA/8080/25	KQA/8063/41	M/P72292	KQM/8080/32	KQA/8080/40
100	KQA/8100/22	KQA/8100/21	KQA/8100/23	KQA/8080/25	KQA/8100/41	M/P72293	KQM/8080/32	KQA/8100/40
125	KQA/8125/22	KQA/8125/21	KQA/8125/23	KQA/8125/25	KQA/8100/41	–	KQM/8125/32	KQA/8125/40
160	–	–	–	–	–	–	–	–
200	–	–	–	–	–	–	–	–
Position	Style	Stainless steel			Position	Style	Standard	
1	B, G	X 5 Cr Ni 18 10 (1.4301; AISI 304). Screws: A2			12	S	Swivel bearing: X 5 Cr Ni 18 10 (1.4301; AISI 304), bearing: PA	
2	C	X 5 Cr Ni 18 10 (1.4301; AISI 304). Screws: A2			15	F	Clevis mounting: X 10 Cr Ni S 18 9 (1.4305; AISI 303), Bolt: X 10 Cr Ni S 18 9 (1.4305; AISI 303), Circlip: X 10 Cr Ni S 18 9 (1.4305; AISI 303)	
5	D	X 5 Cr Ni 18 10 (1.4301; AISI 304). Screws: A2 Bolt: X 10 Cr Ni S 18 9 (1.4305; AISI 303)			17	UF	X 10 Cr Ni S 18 9 (1.4305; AISI 303), Inner ring X 105 Cr Co Mo 18-2 (1.4528), Outer ring X 5 Cr Ni 18 10 (1.4301; AISI 304)	
6	SW	X 6 Cr Ni 18 9 (1.4308; AISI 304)				Bracket for switches	Body: PA/PP, screw and holding strap A2	
11	UH	Adjustable intermediate mounting: X 10 Cr Ni S 18 9 (1.4305; AISI 303), Bolts: X 10 Cr Ni S 18 9 (1.4305; AISI 303), screws: A2						

Accessories Round barrel (ø 32 ... 200 mm)

Model	ø	Port size	Pneufit S Straight adaptor, ISO G	Pneufit S Swivel elbow adaptor ISO G
KA/802032/M/EX/*	32	G1/8	S02250618	S02470618L
KA/802040/M/EX/*	40	G1/4	S02250628	S02470628L
KA/802050/M/EX/*	50	G1/4	S02250828	S02470828L
KA/802063/M/EX/*	63	G3/8	S02250838	S02470838L
KA/802080/M/EX/*	80	G3/8	S02251038	S02470838L
KA/802100/M/EX/*	100	G1/2	S02251248	S02471248L
KA/802125/M/EX/*	125	G1/2	S02251248	S02471248L
KA/802160/M/EX/*	160	G3/4	-	-
KA/802200/M/EX/*	200	G3/4	-	-

For alternative fitting types please contact the technical service.

Magnetically operated switches

ø	M/50/** 	Switch mounting brackets for M/50  23
	Page 12-15	Page 15
32		QM/27/2/1
40		QM/27/2/1
50		QM/27/2/1
63		QM/27/2/1
80		QM/27/2/1
100		QM/27/2/1
125		QM/27/2/1
160		QM/27/2/1
200		QM/27/2/1

Spares kit for profile and round barrel


(wearing parts to be replaced are: piston seals, barrel seals, damping seals and piston rod seals as well as the wear ring)



Spares kit			Option			
Piston rod thread	Male thread		M / MU / MW	JM	W2 / W6	W4
	Female thread		MX / MUX / MWX	JMX	W2X / W6X	W4X
Standard	Model	ø	Standard temperature (-10 °C ... +80 °C)			
	KA/802***	032	KQA/8032/00	KQA/8032/J/00	QA/8032/W1/00	QA/8032/W3/00
		040	KQA/8040/00	KQA/8040/J/00	QA/8040/W1/00	QA/8040/W3/00
		050	KQA/8050/00	KQA/8050/J/00	QA/8050/W1/00	QA/8050/W3/00
		063	KQA/8063/00	KQA/8063/J/00	QA/8063/W1/00	QA/8063/W3/00
		080	KQA/8080/00	KQA/8080/J/00	QA/8080/W1/00	QA/8080/W3/00
		100	KQA/8100/00	KQA/8100/J/00	QA/8100/W1/00	QA/8100/W3/00
		125	KQA/8125/00	KQA/8125/J/00	QA/8125/W1/00	QA/8125/W3/00
		160	KQA/8160/00	KQA/8160/J/00	QA/8160/W1/00	QA/8160/W3/00
		200	KQA/8200/00	KQA/8200/J/00	QA/8200/W1/00	QA/8200/W3/00

Basic dimensions
KA/802000/M/EX
Standard Cylinder
ø 32 - 200 mm

Dimensions in mm
 Projection/First angle

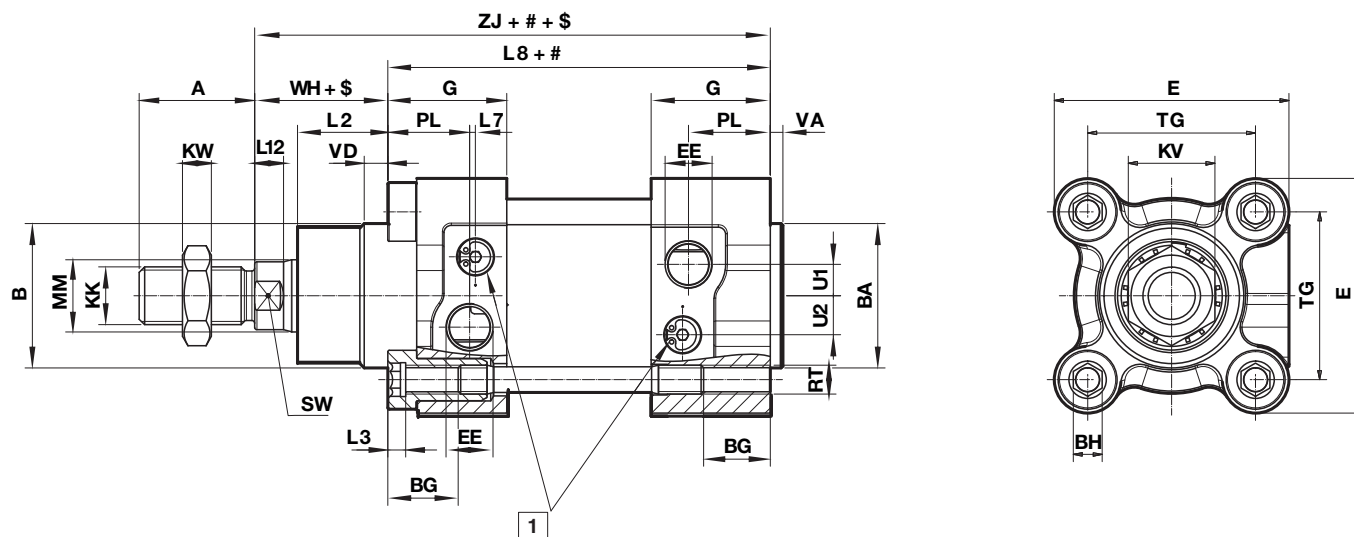


Stroke

\$ Piston rod extension

1 Cushion screw

For additional information please contact the technical service or <http://www.norgren.com>

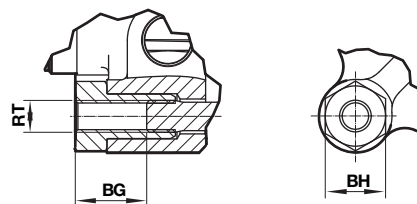

ø	A-0,5	ø B d11	ø BA d11	BG min	BH	E	EE	G	KK	KV	KW	L2	L3	L7	L8	L12	ø MM h9	PL	TG
32	22	30	30	16	6	47	G1/8	29	M10 x 1,25	17	5	19,5	4	6,6	94	5,5	12	15	32,5
40	24	35	35	16	6	53	G1/4	34,5	M12 x 1,25	19	6	22	4	5,6	105	6,5	16	21,5	38
50	32	40	40	16	8	65	G1/4	33	M16 x 1,5	24	8	25	5	1,6	106	8	20	22,7	46,5
63	32	45	45	16	8	75	G3/8	36,5	M16 x 1,5	24	8	25	5	3,6	121	8	20	24,2	56,5
80	40	45	45	17	19	95	G3/8	42	M20 x 1,5	30	10	33	-	1,8	128	10	25	29,7	72
100	40	55	55	17	19	113	G1/2	42	M20 x 1,5	30	10	35	-	3,8	138	10	25	27,7	89
125	54	60	60	20	24	140	G1/2	54	M27 x 2	41	13,5	44	-	1,8	160	13	32	39,7	110
160	72	65	65	28,5	32	180	G3/4	55	M36 x 2	55	18	58	-	-	180	16	40	31,5	140
200	72	75	75	28,5	32	220	G3/4	52,5	M36 x 2	55	18	67	-	-	180	16	40	26,5	175

ø	RT	SW	U1	U2	VA	VD	WH	ZJ	Model Round barrel	at 0 mm	per 25 mm
32	M 6	10	4,6	6,3	3,5	6	26	120	KA/802032/M/EX/*	0,9 (kg)	0,06 (kg)
40	M 6	13	5,8	9,2	3,5	6	30	135	KA/802040/M/EX/*	1,3 (kg)	0,08 (kg)
50	M 8	17	8,7	10,8	3,5	6	37	143	KA/802050/M/EX/*	2,0 (kg)	0,13 (kg)
63	M 8	17	10	12,8	3,5	6	37	158	KA/802063/M/EX/*	3,0 (kg)	0,14 (kg)
80	M 10	22	12	14,5	3,5	6	46	174	KA/802080/M/EX/*	5,0 (kg)	0,30 (kg)
100	M 10	22	9	14,5	3,5	6	51	189	KA/802100/M/EX/*	7,3 (kg)	0,34 (kg)
125	M 12	27	12	17	5,5	8	65	225	KA/802125/M/EX/*	12,2 (kg)	0,51 (kg)
160	M 16	36	15	17	6	10	80	260	KA/802160/M/EX/*	23,4 (kg)	0,88 (kg)
200	M 16	36	19	14	6	10	95	275	KA/802200/M/EX/*	34,4 (kg)	1,14 (kg)

* Please insert stroke length.

Basic Dimension are also for cylinder variants or for different piston rod material

KA/802000/W2/EX - Cylinder with Special Wiper - Seal

KA/802000/MU/EX - Cylinder with Extended Piston Rod

KA/802000/W6/EX - Cylinder with Extended Piston Rod and Special Wiper - Seal


KA/802000/MW/EX - Cylinder without Cushioning

Cylinder variants

KA/802000/MX/EX; /MUX/EX; /MWX/EX; /W2X/EX; /W6X/EX

Cylinder with Female Piston Rod Thread

Dimensions in mm
Projection/First angle

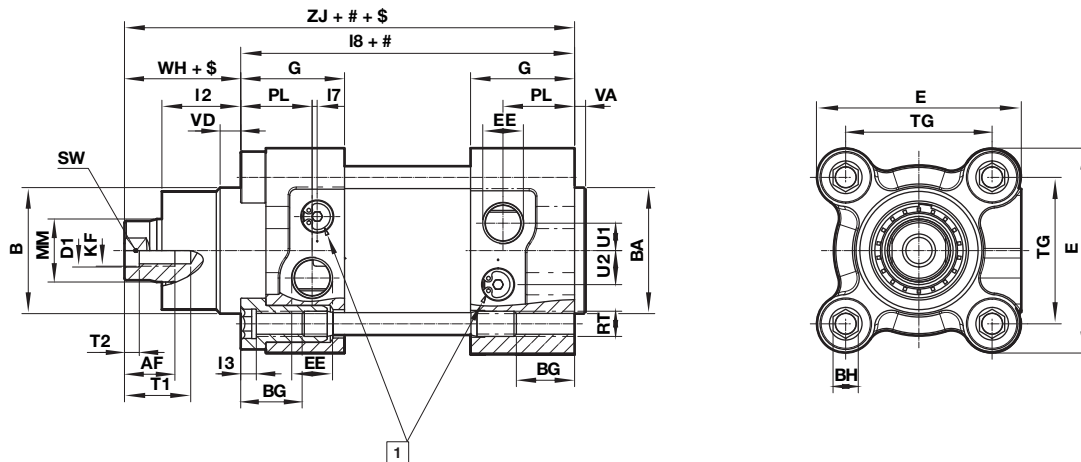


Stroke

ø	AF	ø D1	KF	l12	ø MM h9	SW	T1	T2
32	12	6,4	M6	5,5	12	10	16	2,6
40	12	8,4	M8	6,5	16	13	16	3,3
50	16	10,5	M10	8	20	17	21	4,7
63	16	10,5	M10	8	20	17	21	4,7
80	20	13	M12	10	25	22	25	6,1
100	20	13	M12	10	25	22	25	6,1
125	32	17	M16	13	32	27	38	8

For missing dimensions please see page 8.

KA/802000/JM/EX, KA/802000/W4/EX – Cylinder with Double Ended Piston Rod

KA/802000/JMX/EX, KA/802000/W4X/EX – Cylinder with Double Ended Piston Rod and Female Piston Rod Thread

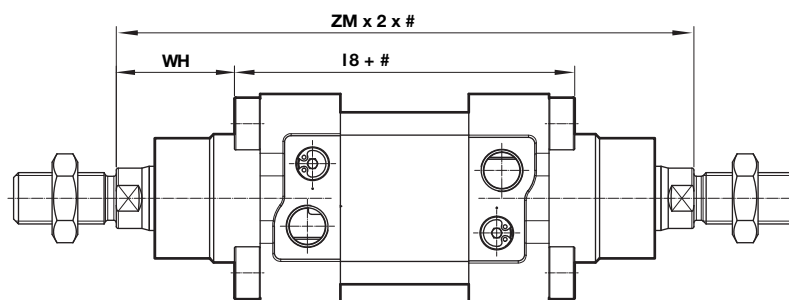

Stroke


ø	L8	WH	ZM	Model Round barrel
32	94	26	146	KA/802032/JM/EX/*
40	105	30	165	KA/802040/JM/EX/*
50	106	37	180	KA/802050/JM/EX/*
63	121	37	195	KA/802063/JM/EX/*
80	128	46	220	KA/802080/JM/EX/*
100	138	51	240	KA/802100/JM/EX/*
125	160	65	290	KA/802125/JM/EX/*
160	180	80	340	KA/802160/JM/EX/*
200	180	95	370	KA/802200/JM/EX/*

* Please insert stroke length; For missing dimensions please see page 8.

Mountings

Front flange B, G

Conforms to ISO 15552, type MF1 and MF2

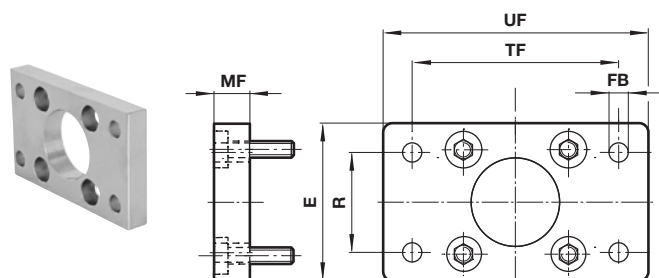


ø	E	ø FB	MF	R	TF	UF	kg	Model (B, G)
32	45	7	10	32	64	80	0,22	KQA/8032/22
40	52	9	10	36	72	90	0,28	KQA/8040/22
50	65	9	12	45	90	110	0,54	KQA/8050/22
63	75	9	12	50	100	120	0,69	KQA/8063/22
80	95	12	16	63	126	150	1,46	KQA/8080/22
100	115	14	16	75	150	170	1,98	KQA/8100/22
125	140	16	20	90	180	224	4,36	KQA/8125/22

Foot mounting C

Conforms to ISO 15552, type MS1


Dimensions in mm
Projection/First angle

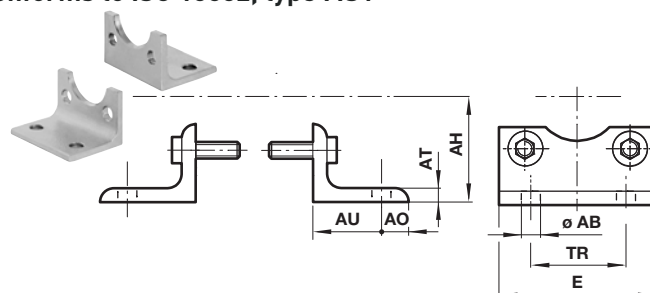

ø	ø AB	AH	AO	AT	AU	E	TR	kg	Model (C)
32	7	32	11	4	24	45	32	0,17	KQA/8032/21
40	9	36	8	4	28	52	36	0,19	KQA/8040/21
50	9	45	15	5	32	65	45	0,40	KQA/8050/21
63	9	50	13	5	32	75	50	0,45	KQA/8063/21
80	12	63	14	6	41	95	63	0,88	KQA/8080/21
100	14	71	16	6	41	115	75	1,13	KQA/8100/21
125	16,5	90	25	8	45	140	90	2,51	KQA/8125/21

Rear clevis D


Conforms to ISO 15552, type MP2

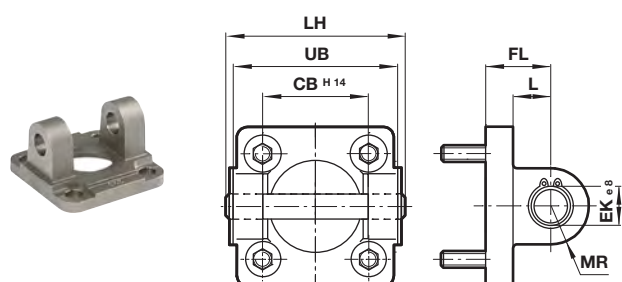

ø	CB H14	ø EK ø8	FL	L	LH	MR	UB	kg	Model (D)
32	26	10	22	12	52	10	45	0,20	KQA/8032/23
40	28	12	25	15	60	12	52	0,32	KQA/8040/23
50	32	12	27	17	68	12	60	0,46	KQA/8050/23
63	40	16	32	20	79	16	70	0,76	KQA/8063/23
80	50	16	36	22	99	16	90	1,32	KQA/8080/23
100	60	20	41	25	119	20	110	2,27	KQA/8100/23
125	70	25	50	30	140	25	130	4,06	KQA/8125/23

Piston rod clevis F


Conforms to DIN ISO 8140

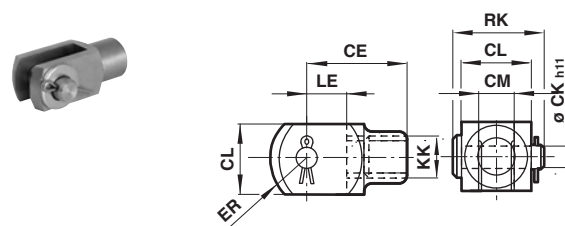

ø	KK	CE	ø CK h11	CL	CM	ER	LE	RK	kg	Model (F)
32	M10x1,25	40	10	20	10	16	20	28	0,10	KQM/55433/25
40	M12x1,25	48	12	24	12	19	24	32	0,16	KQM/55441/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,37	KQM/55451/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,71	KQM/8080/25
125	M27x2	110	30	55	30	45	54	73,5	1,84	KQA/8125/25

Trunnion support S


Conforms to ISO 15552, type AT4

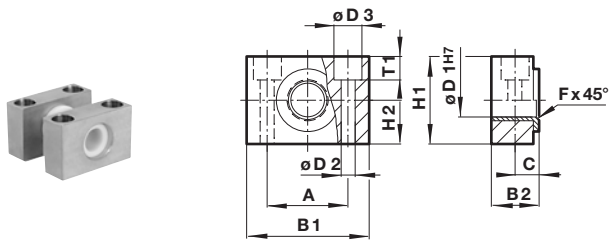

ø	A	B	C	øD1	Fx	H	T1	kg	Model (S)
		1 2		H7 2 3	45°	1 2			
32	32	46 18	10,5	12 6,6 11	1	30 15	6,8 0,1		KQA/8032/41
40/50	36	55 21	12	16 9 15	1,6	36 18 9	0,14		KQA/8040/41
63/80	42	65 23	13	20 11 18	1,6	40 20 11	0,18		KQA/8063/41
100/125	50	75 28,5	16	25 14 20	2	50 25 13	0,34		KQA/8100/41

Universal piston rod eye UF

Conforms to DIN ISO 8139

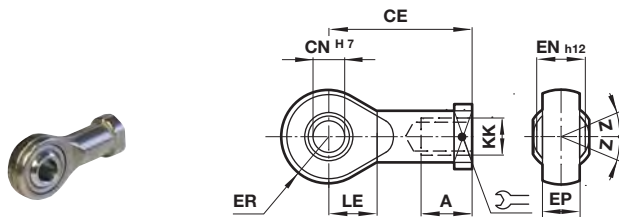


ø	Thread	AX	CE	øCN	EN	ER	LE	Z	kg	Model (UF)
	KK			H7	-0,1					
32	M10x1,25	20	43	10	14	14,5	14	13°	0,07	KQM/8032/32
40	M12x1,25	22	50	12	16	16,5	16	13°	0,11	KQM/8040/32
50/63	M16x1,5	28	64	16	21	21,5	21	15°	0,21	KQM/8050/32
80/100	M20x1,5	33	77	20	25	25,5	25	15°	0,38	KQM/8080/32

Wide hinge SW

Conforms to ISO 15552, type AB7


Dimensions in mm
Projection/First angle

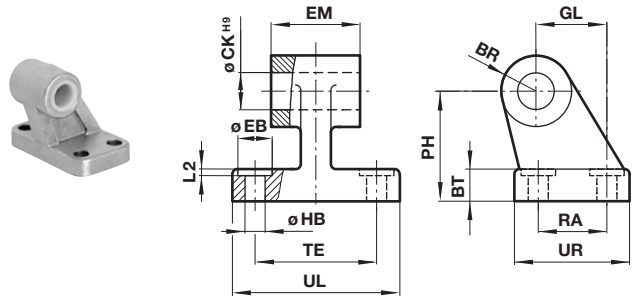

ø	BR	BT	PH	øCK	øEB	EM	GL	øHB	L2	RA	TE	UL	UR	kg	Model (SW)
				H9											
32	10	7	32	10	12	25,6	21	6,6	1,6	18	38	50	31	0,15	M/P72288
40	11	9	36	12	12	27,6	24	6,6	1,6	22	41	53	35	0,21	M/P72289
50	13	11	45	12	15	31,6	33	9	1,6	30	50	65	45	0,41	M/P72290
63	15	11	50	16	15	39,6	37	9	1,6	35	52	67	50	0,53	M/P72291
80	15	14	63	16	18	49,6	47	11	2,5	40	66	84	60	0,82	M/P72292
100	18	15	71	20	18	59,6	55	11	2,5	50	76	94	70	1,22	M/P72293
125	22	20	90	25	20	69	70	14	3,2	60	94	124	90	2,70	M/P19499

Adjustable trunnion mounting UH

Conforms to ISO 15552, type MT4

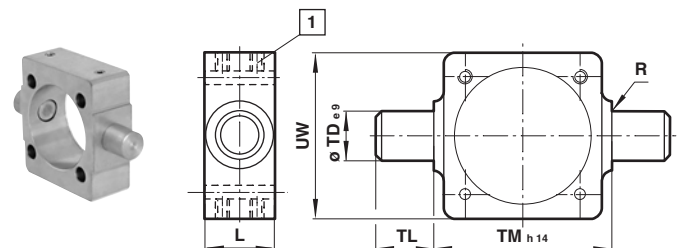


1 Locking screws

Torque max: ø 32 & 40 mm = 6 Nm; ø 50 & 63 mm = 10 Nm;
ø 80 & 100 mm = 15 Nm; ø 125 mm = 25 Nm

ø	L	R	øTD	TL	TM	UW	XV	XV	kg	Model (UH)
			e9		h14		min.	max.		
32	20	1	12	12	50	53	67,5	78,5	0,24	KQA/8032/40
40	24	1,6	16	16	63	65	78,5	86,5	0,48	KQA/8040/40
50	28	1,6	16	16	75	75	84	96	0,7	KQA/8050/40
63	28	1,6	20	20	90	95	91,5	103,5	1,35	KQA/8063/40
80	28	1,6	20	20	110	115	106	114	1,46	KQA/8080/40
100	38	2	25	25	132	140	117	123	2,76	KQA/8100/40
125	50	2	25	25	160	143	144	146	3,28	KQA/8125/40

Style 'UH': It is most important that the locking screws which secure the mounting to the tie rod are tightened to the torque figures shown in the table below. For maximum energy input, consult our Technical Service. Unless otherwise specified, units will be supplied with dimension 'XV' plus half the stroke length. 'XV' = Distance from the piston rod shoulder to the centre of the mounting.

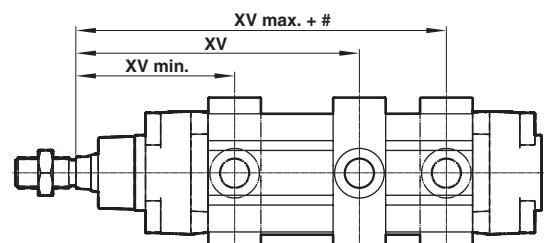

- ATEX - Magnetically operated switch, reed contact
- LED indicator
- CE verified
- Suitable for all cylinder ranges with magnetic piston



Technical features

Operation:

Normal open with LED (yellow)

Switching voltage (U_b):

10 ... 240 V a.c./170 V d.c.

Switching voltage output:

U_b - 2,7 V

Switching current (see graph overleaf):

0,18 A max.

Switching power:

10 W/10 VA max.

Contact resistance:

150 mΩ

Response time:

1,8 ms

Operating temperature:

-20 ... +50 °C (-4 ... +122 °F)



Ex-Identification:

II 3G Ex nC IIC T5 Gc X

II 3D Ex tc IIIC T120 °C Dc X

Protection rating (EN 60529):

IP67

Cable type:

PVC 2 x 0,25 mm²

Cable length:

5 m



Electromagnetic compatibility


according to:

EN 60947-5-2

Materials:


Body: plastic

Cable: see table below

Symbol	Voltage (V a.c.)	(V d.c.)	Current maximum (mA)	Function	Operating temperature (°C)	LED	Protection class	Cable length (m)	Cable type	Weight (g)	Model
 BN	10 ... 240	10 ... 170	180	Closer	-20 ... +50	•	IP67	5	PVC 2 x 0,25	40	M/50/LXU/5V
BU											

Color code: BN = brown, BU = blue


Switching current and switching voltage

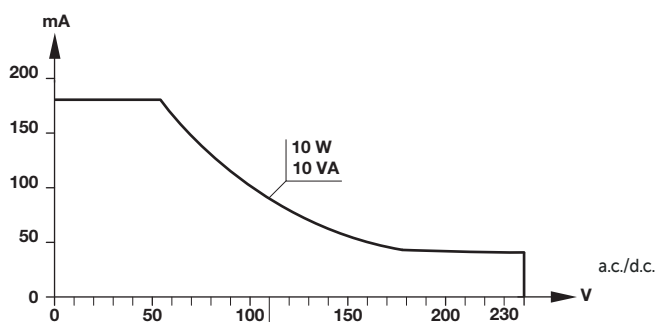

Dimensions

Cable length L = 5 m

Dimensions in mm
Projection/First angle

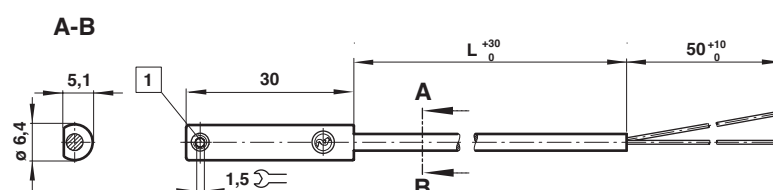

1 Fixing screw

ATTENTION:

The setting of magnetic switches on a cylinder barrel forms an ATEX assembly:

- Each part is separate classified according ATEX for use in potentially explosive atmospheres.
- The resulting range of approved applications for the module corresponds to that of the individual part assigned to the lowest category.
- The result concerns the device category, potentially explosive atmosphere G or D, max. surface temperature and explosion classification if applicable.

- Magnetically operated switch, solid state - round style
- IO-Link version available
- Suitable for all cylinder ranges with magnetic piston
- Resistant, reliable switching with a very fast response time
- Particularly suited for use in high levels of vibration
- LED indicator
- UL listed



IO-Link



Technical features

Operation:

PNP (see table)
Output with LED (yellow)
Normally open (standard)

Switching voltage (U_b):

10 ... 30 V d.c.
("supply class 2" acc. to cULus)

Voltage drop at output:

< 2,5 V

Residual current:

< 0,5 mA

Switching current (see graph):

150 mA max. (standard)
100 mA max. (M/50/IXP)

Switching power:

4,5 W max. (standard)
3,0 W max. (M/50/IXP)

Response time:

< 0,1 ms (standard)
< 5 ms (M/50/IXP)

Operating frequency:

1 kHz (standard)
200 Hz (M/50/IXP)

Protection rating (EN 60529):

IP67

Ambient temperature:

-20 ... +50 °C (-4 ... 122 °F)

Responsiveness:

2,8 mT

Hysteresis:

0,5 ... 1,5 mT (standard)
0,2 mT (M/50/IXP)

Repeatability:

< 0,1 mT

Ex-Identification:

II 3G Ex ec IIC T4 Gc X
II 3D Ex tc IIIC T110 °C Dc X

Cable type:

PVC 3 x 0,14 mm² (Standard)
PUR 3 x 0,14 mm² (all variants with connector)




Cable length: 5 m

Electromagnetic compatibility

according to:
EN 60947-5-2

Materials:

Housing: plastic
Thread insert: brass
Set screw: stainless steel
Cable: see table below

Symbol	Voltage (V d.c.)	Current maximum (mA)	Function	IO-Link *1)	Ambient temperature (°C)	LED	Protection class	Connector	Cable length (m)	Cable type	Weight (g)	Model
	10 ... 30	150	PNP		-20 ... +50	•	IP67	---	5	PVC 3 x 0,14	56	M/50/EXP/5V
	10 ... 30	100	PNP / NPN	•	-20 ... +50	•	IP67	---	5	PVC 3 x 0,14	56	M/50/IXP/5V
	10 ... 30	150	PNP		-20 ... +50	•	IP67	M8 x 1	0,3	PUR 3 x 0,14	7	M/50/EXP/CP
	10 ... 30	150	PNP		-20 ... +50	•	IP67	M12 x 1	0,3	PUR 3 x 0,14	16	M/50/EXP/CC

Color code: see next page

*1) IO-Link functionality: see next page

IO-Link Switch conforming to IEC 61131-9

Properties and Functionality	M/50/EXP	M/50/IXP
Operating Mode	Standard	Standard
Power LED		•
LED sensor signal	•	•
Normally open (delivery status)	•	•
Normally closed		O
Delay mode		O
Installation aid		•
Temperature measurement		•
Detection counter		•
Teach functionality		•
Responsiveness adjustment		•

Note: IODD for the M/50/IXP switches available on the Norgren homepage.

<https://www.norgren.com/uk/en/technical-support/software>



• = included

O = optional (manufacture pre-setting required)

Switching current and switching voltage


M/50/EXP

M/50/IXP

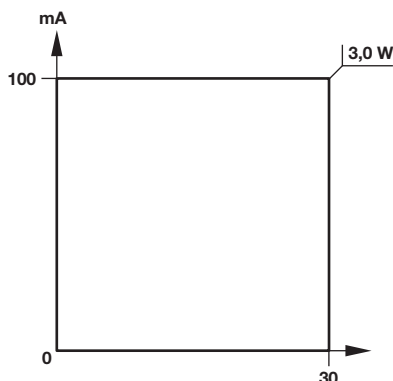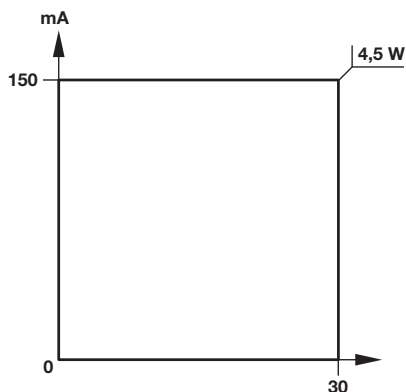

Dimensions


M/50/EXP/5V
M/50/IXP/5V
Cable length L = 2, 5 or 10 m

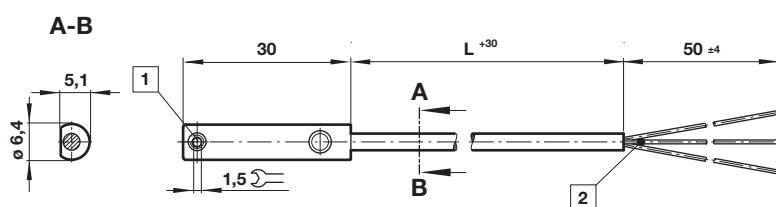


Dimensions in mm
Projection/First angle



M/50/EXP/CP

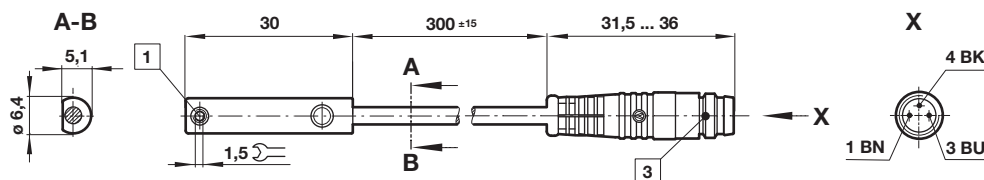

M/50/EXP/CC

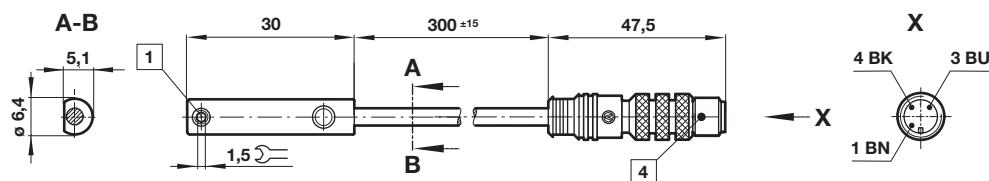

- 1 Fixing screw
- 2 Color code: BK = black (output); BN = brown (+); BU = blue (-)
- 3 Connector M8 x 1; 1 BN = +; 3 BU = -; 4 BK = output
- 4 Connector M12 x 1; 1 BN = +; 3 BU = -; 4 BK = output


ATTENTION:

The setting of magnetic switches on a cylinder barrel forms an ATEX assembly:

- Each part is separate classified according ATEX for use in potentially explosive atmospheres.
- The resulting range of approved applications for the module corresponds to that of the individual part assigned to the lowest category.
- The result concerns the device category, potentially explosive atmosphere G or D, max. surface temperature and explosion classification if applicable.

Protection of the magnetic switch

1. Install the switch in a way that ensures to protect the switch against mechanical damage, shock or impact from any direction.
2. For an open installation of a magnetic switch onto a cylinder barrel with external tie rods, an additional protection element for the magnetic switch and its cable has to be installed with the mounting element. For the protection element of the housing a separate order for M/P73668 is required.

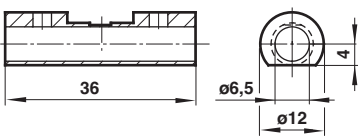Cylinder with external tie rods  Cylinder ø (mm) 32 ... 200	Mounting element for magnetic switch  Model QM/27/2/1	Protection unit ATEX  Model M/P735463	
---	---	---	---

QM/27/2/1 – Switch mounting brackets for Round barrel


Switch: M/50



ø	A	B	L	Weight (kg)	Model
32	9	6	12	0,010	QM/27/2/1
40	9	7	12	0,010	QM/27/2/1
50	7	5	12	0,010	QM/27/2/1

ø	A	B	L	Weight (kg)	Model
63	7	6	12	0,010	QM/27/2/1
80	4	4	12	0,010	QM/27/2/1
100	3	2	12	0,010	QM/27/2/1

ø	A	B	L	Weight (kg)	Model
125	-2	-2	12	0,010	QM/27/2/1
160	-10	-9	12	0,010	QM/27/2/1
200	-17	-16	12	0,010	QM/27/2/1

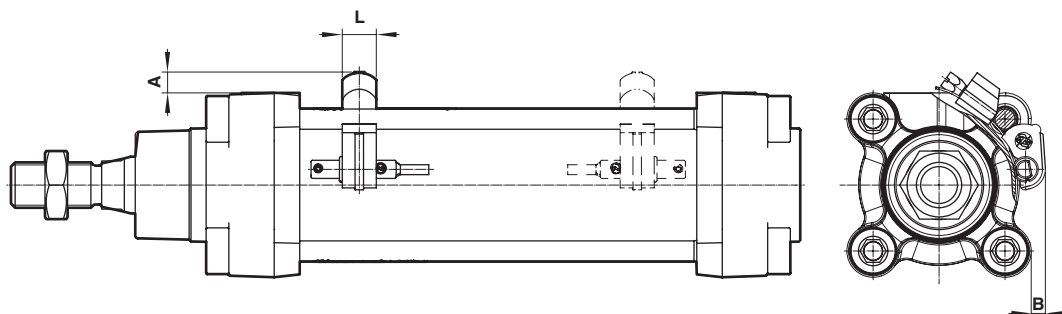

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren GmbH.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.