

- > Port size: DN 3 ... 8, G1/4 ... 3/8
- > Suitable for aggressive fluids
- > Functional design
- > Compact solenoid with integrated core tube
- > Core tube protected with PTFE-bellow
- > Unsusceptible to calcification and magnetization of foreign particles
- > International approvals



Technical features

Medium:
Aggressive gases and fluids

Switching function:
Normally closed

Operation:
Directly solenoid actuated

Type:
Seat valve operating without differential pressure

Mounting position:
Optional, preferably solenoid vertical on top

Flow direction:
Determined

Port size:
G1/4, G3/8

Operating pressure:
0 ... 7 bar (0 ... 101 psi)

Fluid temperature:
-10° ... +110°C (+14° ... +230°F)

Ambient temperature:
-10° ... +50°C (+14° ... +122°F)

Material:
Body: PVDF
Seat seal: EPDM
Internal parts: PTFE-bellows

For contaminated fluids (particle > 1 mm) insertion of a strainer is recommended.

Technical data – standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	3	0,23	0 ... 7	0 ... 101	0,3	8208000.8050.xxxxx	8208000.8051.xxxxx
	G3/8	3	0,23	0 ... 7	0 ... 101	0,3	8208100.8050.xxxxx	8208100.8051.xxxxx
	G1/4	4,5	0,42	0 ... 5	0 ... 72	0,3	8208060.8050.xxxxx	8208060.8051.xxxxx
	G3/8	4,5	0,42	0 ... 5	0 ... 72	0,3	8208160.8050.xxxxx	8208160.8051.xxxxx
	G1/4	6	0,62	0 ... 2	0 ... 29	0,3	8208070.8050.xxxxx	8208070.8051.xxxxx
	G3/8	6	0,62	0 ... 2	0 ... 29	0,3	8208170.8050.xxxxx	8208170.8051.xxxxx
	G1/4	8	0,83	0 ... 1	0 ... 14	0,3	8208080.8050.xxxxx	8208080.8051.xxxxx
	G3/8	8	0,83	0 ... 1	0 ... 14	0,3	8208180.8050.xxxxx	8208180.8051.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 80 mm²/s (cSt)

Option selector

8208★★★★.★★★★.★★★★

Port size	Substitute
1/4	0
3/8	1
Orifice (mm)	Substitute
3	0
4,5	6
6	7
8	8
Valve options	Substitute
Seat seal FPM, max. fluid temperature +110°C	3
Seat and soft seal PTFE, max. fluid temperature +110°C	6

Frequency	Substitute
See table frequency codes	xx
Voltage	Substitute
See Voltage codes	xxx
Solenoid options	Substitute
G1/4 ... 3/8 Solenoid in V d.c.	8050
G1/4 ... 3/8 Solenoid in V a.c.	8051

Standard solenoid systems

Voltage and Frequency Solenoid 8050					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
Voltage and Frequency Solenoid 8051					
110	49	110 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA

*3) A.c. only with rectifier plug

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.
At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So-lenoid	Standard voltages
II 2G	Ex eb mb IIC T3 Gb	IP66	6202	24 V d.c., 110 V a.c., 230 V a.c.
II 2D	Ex mb tb IIIB T150°C Db			


Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

Further versions on request!

Section View

G1/4 ... 3/8

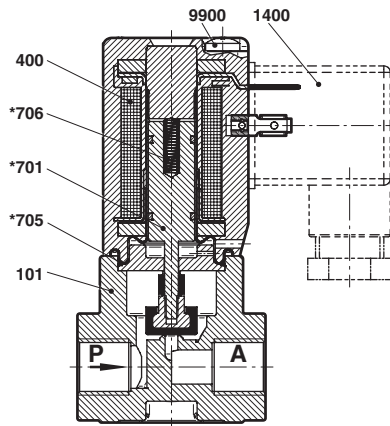


No.	Description
101	Valve body
400	Solenoid
*701	Plunger
*705	O-ring
*706	Pressure spring
1400	Socket (included)
9900	Oval head cap screw

* These individual parts form a complete wearing unit.
When ordering spare parts please state Model No. and Series No.

Dimensions

G1/4 ... 3/8

Dimensions in mm
Projection/First angle

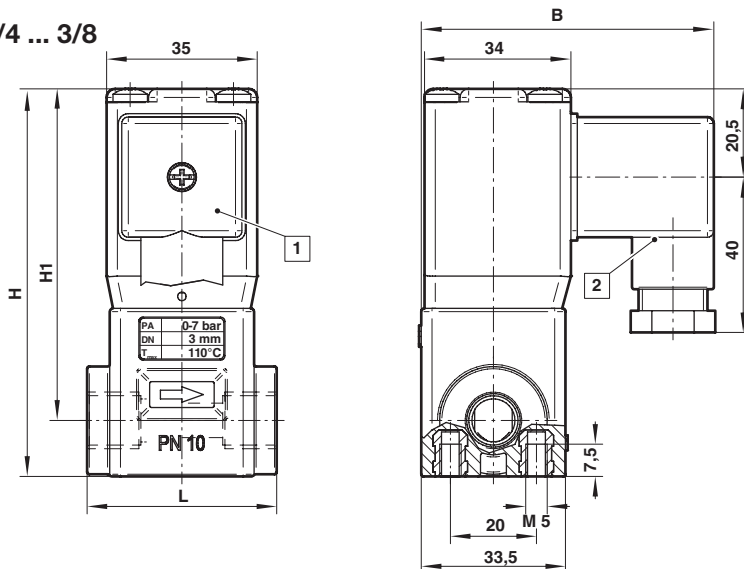

- 1 Solenoid rotatable 4 x 90°
- 2 Socket turnable 4 x 90°
(Socket included)

Port size R	Orifice (mm)	B *4)	H	H1	L	Model
G1/4	3	70	90	77	44	8208000.805x.xxxxx
G3/8	3	70	90	77	44	8208100.805x.xxxxx
G1/4	4,5	70	90	77	44	8208060.805x.xxxxx
G3/8	4,5	70	90	77	44	8208160.805x.xxxxx
G1/4	6	70	90	77	44	8208070.805x.xxxxx
G3/8	6	70	90	77	44	8208170.805x.xxxxx
G1/4	8	70	90	77	44	8208080.805x.xxxxx
G3/8	8	70	90	77	44	8208180.805x.xxxxx

*4) max. depth

Note to Pressure Equipment Directive (PED):

The valves of this series are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. The CE-sign at the valve does not refer to the PED. Thus the declaration of conformity is not longer applicable for this directive.

Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3 and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.