


- > Port size: DN 15 ... 50, Flange connection, Pressure rating PN 40
- > Compact build piston valve
- > Functional design
- > High flow rate
- > Piston guided in PTFE rings
- > Long lifetime
- > Solenoid interchangeable without tools (*Click-on*<sup>®</sup>)
- > International approvals

*Click-on*<sup>®</sup>



### Technical features

**Medium:**  
Neutral gases and liquid fluids

**Switching function:**  
Normally closed

**Operation:**  
Indirectly solenoid actuated

**Mounting position:**  
Optional, preferably solenoid vertical on top

**Flow direction:**  
Determined

**Port size:**  
DN 15, DN 20, DN 25, DN 32, DN 40, DN 50

**Operating pressure:**  
0,5 ... 40 bar (7 ... 580 psi)


**Fluid temperature:**  
-20° ... +90°C (-4° ... +194°F)

**Ambient temperature:**  
-20° ... +50°C (-4° ... +122°F)

**Material:**  
Body: Cast steel (1.0619), Brass (CW617N)  
Seat seal: NBR  
Internal parts: Stainless steel, Brass, PTFE

For contaminated fluids insertion of a strainer is recommended.

### Technical data - standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar) (psi)		Weight (kg)	Model
	15	4,4	0,5 ... 40	7,25 ... 580	3,2	8566200.9151.xxxxx
	20	7	0,5 ... 40	7,25 ... 580	3,6	8566300.9151.xxxxx
	25	10,5	0,5 ... 40	7,25 ... 580	4,2	8566400.9151.xxxxx
	32	25	0,5 ... 40	7,25 ... 580	7,2	8566500.9151.xxxxx
	40	27	0,5 ... 40	7,25 ... 580	7,6	8566600.9151.xxxxx
	50	43	0,5 ... 40	7,25 ... 580	8,8	8566700.9151.xxxxx


xxxxx Please insert voltage and frequency codes

\*1) Cv-value (US) ≈ kv-Wert x 1,2

\*2) For gases and liquid fluids up to 60 mm²/s (cSt)

Option selector

8566★ ★ ★ . ★ ★ ★ ★ . ★ ★ ★ ★ ★ ★

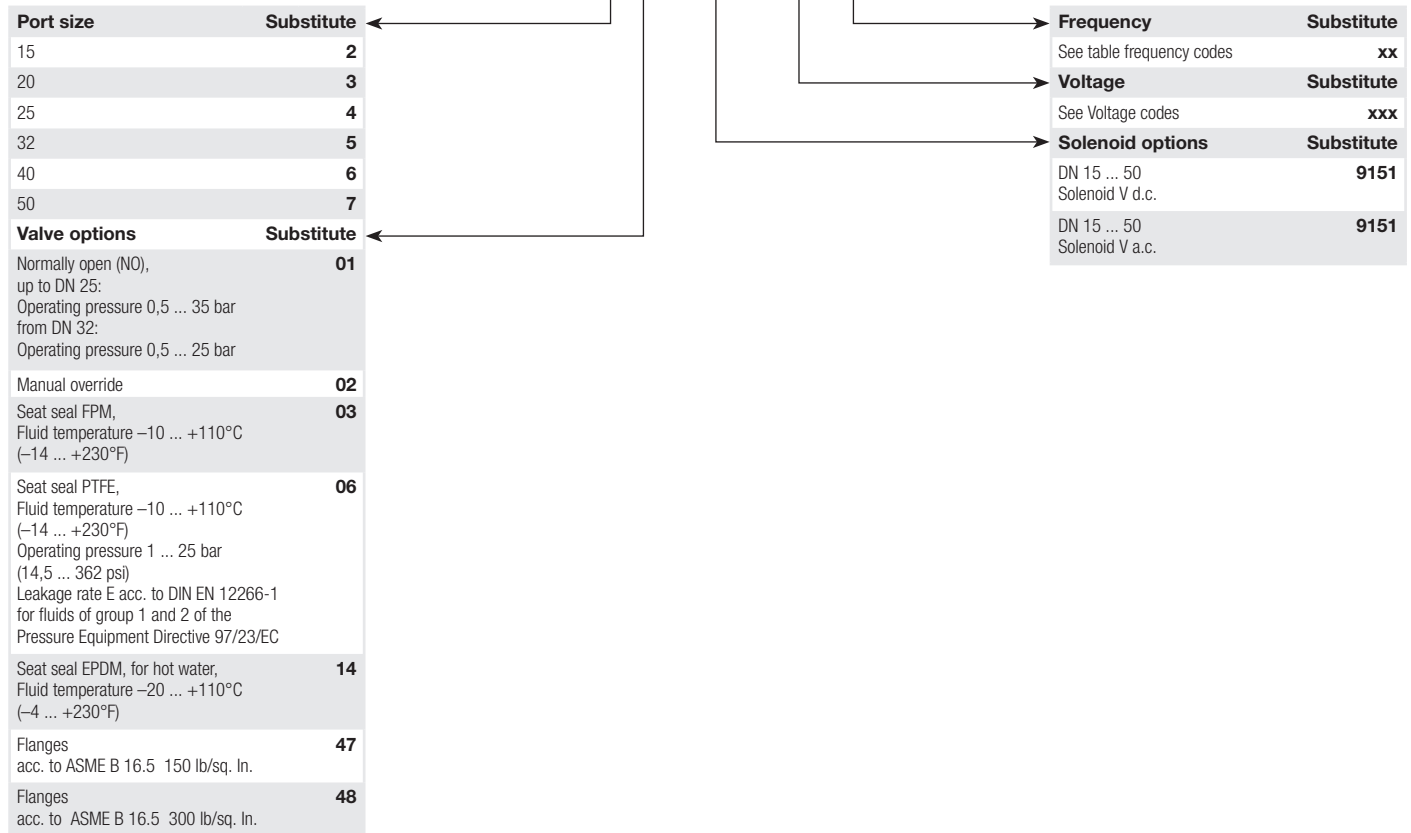

Standard solenoid systems

Voltage and Frequency Solenoid 9151 *3)					
Code	Code	Voltage	Frequency	Power consumption	
Voltage	Frequency			Inrush	Holding
024	00	24 V d.c.	-	17 W	17 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	50	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA

\*3)  US coil only

Electrical details for all solenoid systems

<b>Design</b>	DIN VDE 0580
<b>Voltage range</b>	±10%
<b>Duty cycle</b>	100% ED
<b>Protection class</b>	EN 60529 IP65
<b>Socket</b>	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C. At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas


ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex d mb IIC T4/T5 Gb Ex tb IIIC T130°C/T95°C Db up to DN 25: Operating pressure 0,5 ... 16 bar (7,25 ... 232 psi) from DN 32: Operating pressure 0,5 ... 10 bar (7,25 ... 145 psi)	IP66	468x	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

Further versions on request!


**Section View**  
**DN 15 ... 50**

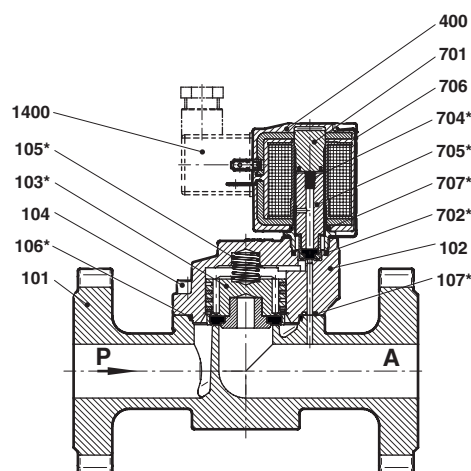

No.	Description
101	Valve body
102	Valve cover
*103	Valve piston
104	Straight pin
*105	Pressure spring
*106	Seal ring
*107	O-ring
400	Solenoid
701	Core tube
*702	O-ring
*704	Pressure spring
*705	Core
706	Spring band
*707	O-ring
1400	Socket (included)

\* These individual parts form a complete wearing unit.  
When ordering spare parts please state Model No and Series No.

**Dimensions**  
**DN 15 ... 50**

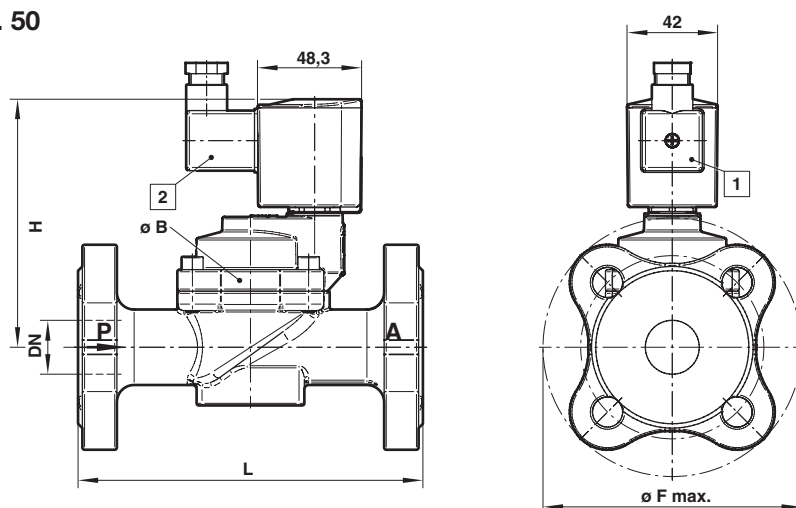

Dimensions in mm  
Projection/First angle



- 1 Socket rotatable 360°
- 2 Socket turnable 4 x 90°  
(Socket included)

Orifice (mm)	ø B	ø F max.	H	L	Model
15	44	96	96	130	8566200.9151.xxxx
20	50	110	108,5	150	8566300.9151.xxxx
25	62	115	115	160	8566400.9151.xxxx
32	92	140	138,5	180	8566500.9151.xxxx
40	92	150	143,5	200	8566600.9151.xxxx
50	109	165	156,5	230	8566700.9151.xxxx

Contact face acc. to DIN EN 1092-1/B

**Note to Pressure Equipment Directive (PED):**

The valves of this series up to and including DN 25 (G1) are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. The CE-sign at the valve does not refer to the PED. Thus the declaration of conformity is not longer applicable for this directive.

**For valves > DN 25 (G1) Art. 4 § (1) Letter d) applies:**

The basic requirements of the Enclosure I of the PED must be fulfilled. The CE-sign at the valve includes the PED. A certificate of conformity of this directive will be available on request.

**Note to Electromagnetic Compatibility Guideline (EEC):**

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3 and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

**Note to EAC marking:**

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.