

L07 Miniature lubtricators

- Port size: G1/8 & G1/4
- Very compact unit
- Constant oil/air ratio over a wide range of flows



Technical features

Medium:
Compressed air only

Maximum inlet pressure:
10 bar (145 psi) (Transparent bowl)
17 bar (246 psi) (Metal bowl)

Typical flow:
Start point 0,24 dm³/s
see below


Port sizes:
G1/8 or G1/4

Bowl volume:
31 ml

Ambient/Media temperature:
Transparent bowl
-20 ... +50°C (-4 ... +122°F)
Metal bowl
-20 ... +80°C (-4 ... +176°F)
Air supply must be dry enough
to avoid ice formation at
temperatures below +2°C (+35°F)

Materials:
Body: Zinc alloy
Bowl: PC or Zinc alloy
Sight-feed dome: PA
Elastomers: NBR

Technical data, standard models

Symbol	Port size	Flow *1) (dm ³ /s)	Bowl	Weight (kg)	Model
	G1/8	5	Transparent	0,13	L07-100-MPQG
	G1/4	6,7	Transparent	0,13	L07-200-MPQG

*1) Typical flow with 6,3 bar (91 psi) inlet pressure and a 0,3 bar drop from set.


Option selector

L07-★00-MP★★

Port size	Substitute
1/8"	1
1/4"	2




Thread form	Substitute
PTF	A
ISO G	G
Bowl	Substitute
Transparent with drain	A
Transparent non-drain	Q
Metal with drain	M

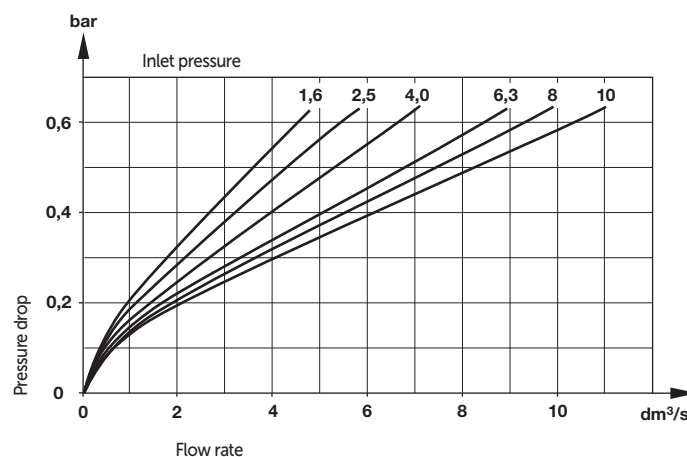Flow characteristics Port size 1/4"



Accessories and service kit



Wall mounting bracket and panel nut	Panel nut	Service kit
		
1 & 4	4	
18-025-003 (with plastic nut)	2962-04 (Metal)	L07-KIT
18-025-004 (with metal nut)	2962-89 (Plastic)	



Dimensions

Non-drain

Manual drain

Bracket mounting

Dimensions in mm
Projection/First angle

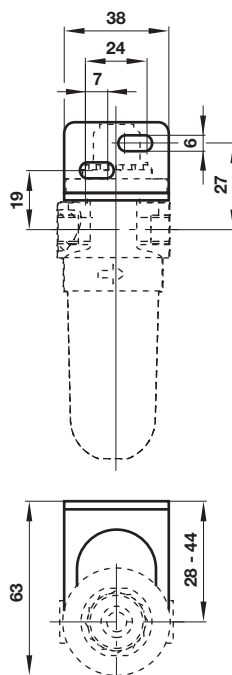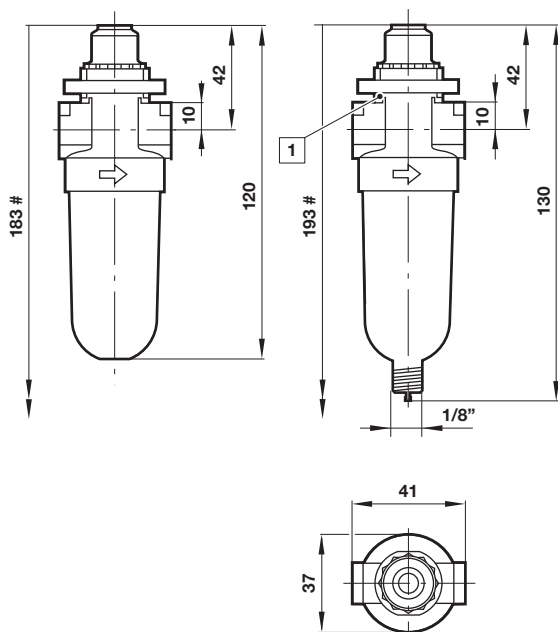

Minimum clearance required to remove bowl

1 Panel mounting hole Ø 31 mm

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/ data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.