

- Very compact trip and detector valves
- Robust for their size
- In-line mounting
- Ideal for the pilot operation of larger directional control valves


**3/2 Poppet Valves
Mechanically Actuated
G¹/₈**

Technical Data

Medium:

Compressed air, filtered, lubricated and non-lubricated

Operation:

Poppet valve, directly actuated

Mounting:

Through holes in valve body

Port Size:

G¹/₈

Operating Pressure:

0 - 10 bar

Flow (to CETOP RP50P):

'C' - Conductance dm³/s/bar 0,9

'b' - Critical pressure ratio 0,38

Cv 0,07

Operating Temperature:

0°C* to +70°C


*Consult our Technical Service for use below +2°C

Alternative Models

Other operator types for the 06 Series are also available:

Section 5.5. - Pressure operated models


Section 5.7. - Manually operated models


Materials

Diecast zinc alloy body, brass plunger, steel lever, acetal roller, aluminium ball housing, stainless steel ball and spring, nitrile rubber seals.

Ordering Information

To order a complete valve, quote model number from table overleaf, e.g. 06 1301 00 for the Plunger Actuated, Spring Return model. The basic body, plunger and ball type operating heads can also be ordered separately, quote model numbers overleaf.







General Information

Model	Type	Operator	Return	Weight (kg)	Spares kit
06 1301 00	Normally closed	Plunger	Spring	0,11	Not available
06 1304 00	Normally closed	Ball	Spring	0,12	Not available
06 1216 00	Normally closed	Roller	Spring	0,12	Not available
06 1217 00	Normally closed	One-way Trip	Spring	0,12	Not available

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under 'Technical Data'. Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN MARTONAIR. Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure. **System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.** System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.



Plunger Actuated, Spring Return

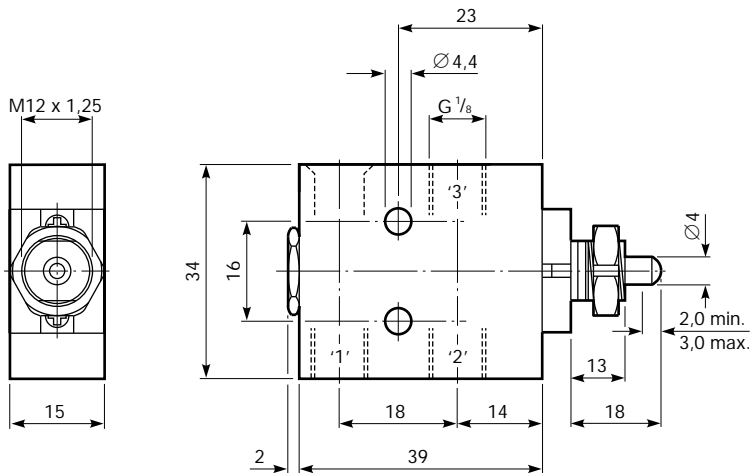

Model Number: **06 1301 00**
 Type: 3/2 with ported exhaust. Exhaust must not be restricted by flow controls.
 Operating Force: 18 N @ 5,5 bar
 Basic Body: **06 1300 00**
 Operating Head: **06 0001 00**



Ball, Spring Return

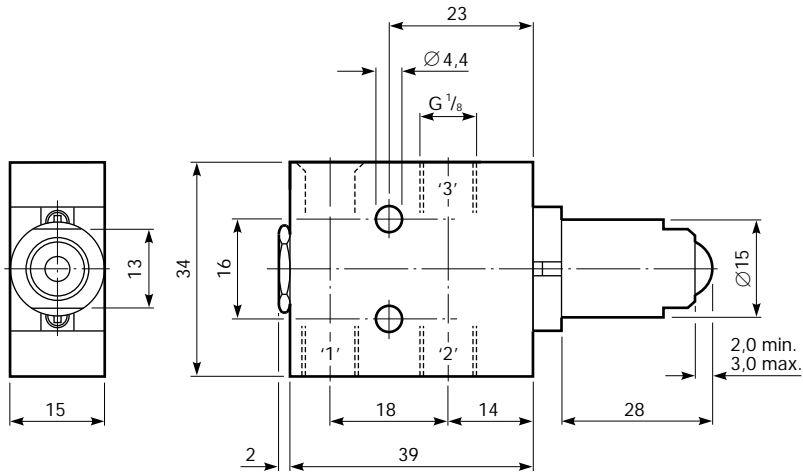

Model Number: **06 1304 00**



Type: 3/2 with ported exhaust. Exhaust must not be restricted by flow controls.

Operating Force: 18 N @ 5,5 bar

Basic Body: **06 1300 00**

Operating Head: **06 0004 00**

Roller Actuated, Spring Return

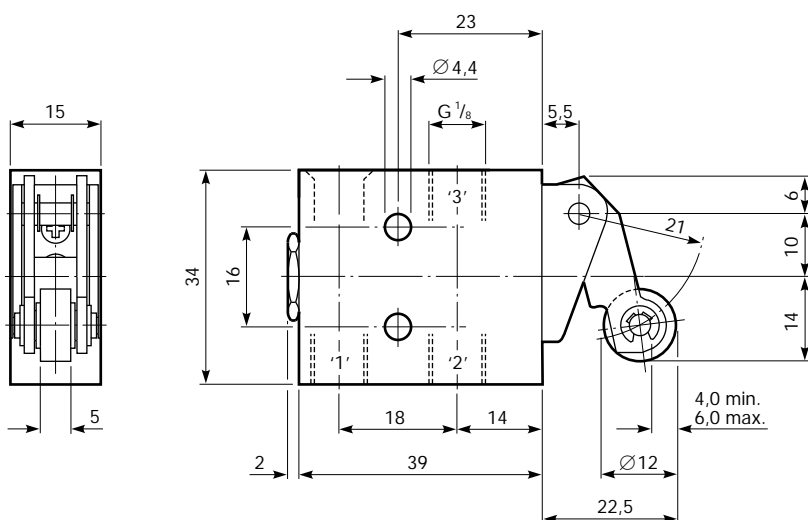



Model Number: **06 1216 00**

Type: 3/2 with open exhaust

Operating Force: 18 N @ 5,5 bar



One-way Trip Actuated, Spring Return

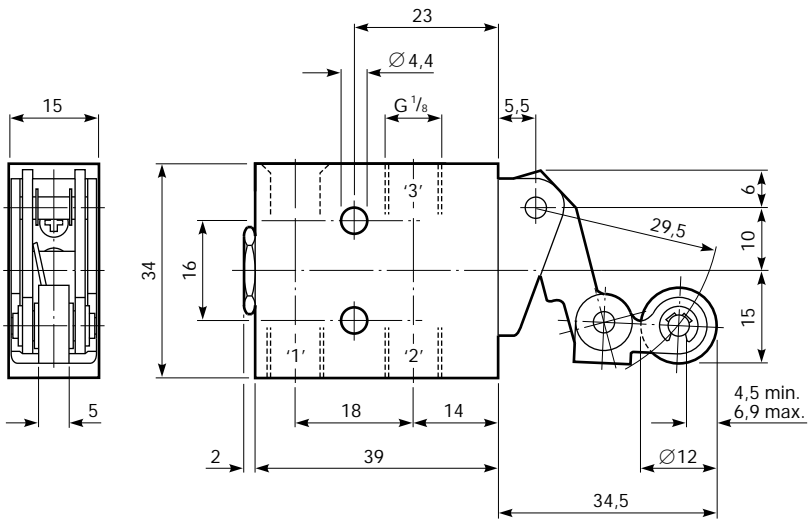

Model Number: **06 1217 00**
Type: 3/2 with open exhaust
Operating Force: 18 N @ 5,5 bar