


- > Flanged version
- > Valve switches at power failure into starting position (mechanical spring return)
- > Add-on manual override optional
- > Suited for outdoor use under critical environment conditions (see solenoid list)

- > Wide temperature range
- > Shock vibration tested to EN 61373, Category 1, class A and B
- > Fire & Smoke (F&S) tested to EN 45545-2 HL3 (optional versions)



Technical features

Medium:
Compressed air, filtered, non-lubricated and dry
Other gas and liquid fluids on request

Operation:
Direct solenoid operated poppet valves

Flow direction:
Optional

Mounting position:
Any, but preferably with solenoid vertical

Flow:
Gaseous fluids: 340 l/min
Liquid fluids: Kv 0,34

Port size:
Flanged version, port 3 - G1/8

Orifice:
5 mm

Operating pressure:
0 ... 10 bar (0 ... 145 psi)

Ambient/Media temperature:
-40 ... +80°C (-40 ... +176°F) depending on solenoid system.
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).

Temperature solenoid:
See table

Material:
Housing: hard anodized aluminium
Seal: VMQ
Inner parts: stainless steel, brass

Technical data

Symbol	Port size 1 & 2	3	Operating pressure (bar)	Material Seat seal	Temperature *2) (°C)	Manual override *3)	Weight (kg)	Dimension No.	Solenoid group	Model *1) *4)
	Flange	G1/8	0 ... 10	VMQ	-40 ... +80	without	0,65	1	0800 & 5270 or 9318 (F&S)	VR24Z9565-01XXP

*1) xx = Insert solenoid code on 13th digit and voltage code on 14th digit, see below!
 *2) Depending on solenoid system, see page 2!
 *3) Push only and turn and lock on request
 *4) Further options on request




Option selector

VR24Z9565-01★★P

Solenoids	Substitute
5270	2
0800	4
9318 (Fire & Smoke)	8


Voltage	Substitute
24 V d.c.	3
36 V d.c.	4
72 V d.c.	A
110 V d.c.	7


Solenoid operators


	Power consumption 24 V d.c. (W)	Rated current 24 V d.c. (mA)	Temperature range (°C)	Voltage tolerance (%)	Protection class *7)	Electrical connection	Weight (kg)	Dimension No.	Circuit diagram No.	Model	Code
		16,9	703 (24 V d.c.) 425 (36 V d.c.) *10) 193 (72 V d.c.) *10) 139 (110 V d.c.)	-25 ... +40 -25 ... +60	+20/-30 (+15/-22) *9) +10/-30 (+6/-22) *9) () for 37,5 & 74 V d.c. only	IP 65 (with Connector *5)	Connector DIN EN 175301-803 Form A *6)	0,26	3	1	0800
	8,9	369 (24 V d.c.) 222 (36 V d.c.) *10) 120 (72 V d.c.) *10) 69 (110 V d.c.)	-40 ... +60 -40 ... +80	+30/-15 (+25/-17) +30/-10 (+25/-12) () for 37,5 & 74 V d.c. only	IP 65	M20 x 1,5 *6)	0,500	6	4	5270 *8)	2
	14	1165 (12 V d.c.) 584 (24 V d.c.) 389 (36 V d.c.) 194 (72 V d.c.) 165 (85 V d.c.) 127 (110 V d.c.)	-40 ... +70	+/- 30%	IP 65	Connector DIN EN 175301-803 Form A *11)	0,41	7	1	9318	8

- *5) Required connector: type 0570275
- *6) Connector cable gland not supplied, see table »Accessories«
- *7) IP-Protection class according to EN60529
- *8) Suitable for outdoor installation
- *9) Working pressure applied to port 3: -16%
- *10) Voltage range: 36 ... 37,5 d.c. and 72 ... 74 V d.c.
- *11) Fire & Smoke tested to EN 45545-2 HL3

Spare coils

	Voltage	Power consumption	Model
	24 V d.c.	16,9 W	0000000.0800.0240R
	36 V d.c.	16,9 W	0000000.0800.0360R
	72 V d.c.	16,9 W	0000000.0800.0720R
	110 V d.c.	16,9 W	0000000.0800.1100R

	Voltage	Power consumption	Model
	24 V d.c.	8,9 W	0000000.5270.0240R
	36 V d.c.	8,9 W	0000000.5270.0360R
	72 V d.c.	8,9 W	0000000.5270.0720R
	110 V d.c.	8,9 W	0000000.5270.1100R

	Voltage	Power consumption	Model
	24 V d.c.	14,0 W	0000000.9318.0240R
	36 V d.c.	14,0 W	0000000.9318.0360R
	72 V d.c.	14,0 W	0000000.9318.0720R
	110 V d.c.	14,0 W	0000000.9318.1100R

Accessories

Cable gland				Connector DIN EN 175301-803	
Page 4 Thread	Cable Ø	Material	Model		
M 20x1,5	5,0...9,0 mm	PA, UL94 V0	0110854	0570275 (form A)	
M 20x1,5	6,0...12 mm	PA, UL94 V0	0110855	SPC/991500/5 (form A, F&S*1)) SPC/991500/12 (form A, F&S*1), with anti-surge diode)	


*1) Fire & Smoke tested according to EN 45545-2

Valve

Dimensions in mm
Projection/First angle



1

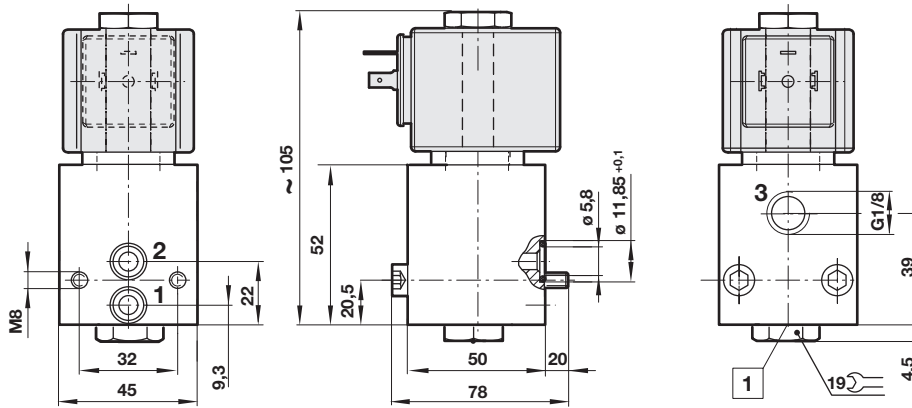


1 Add-on manual override, below

Add-on manual override


Without detent
Model: 0600205

With detent
Model: 0601765

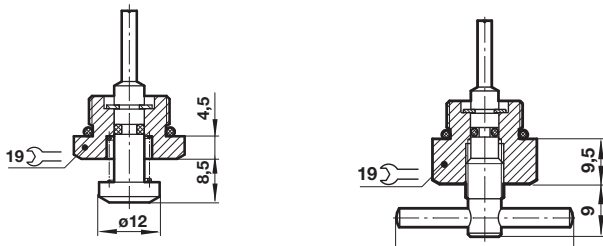


Solenoids

3


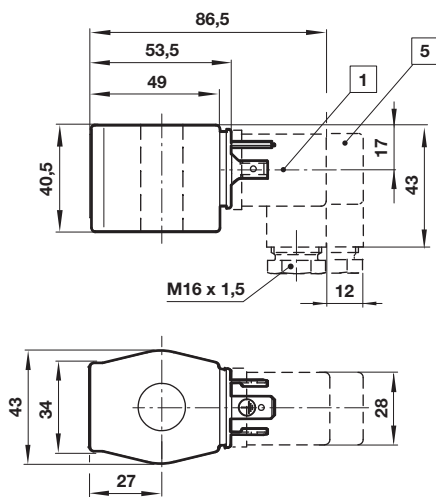


6

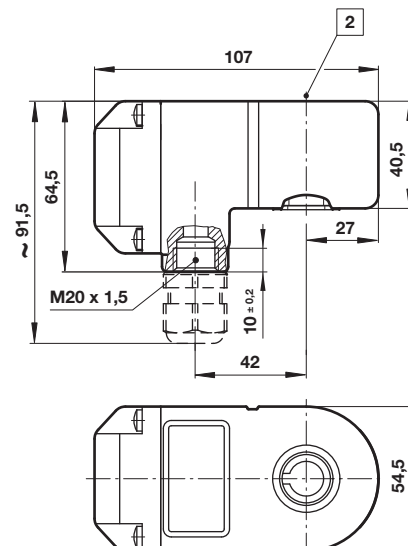

- 1 Connector can be indexed by 4x90°
- 2 Ø 16 or 13 (with spacer tube)
- 5 With cable gland, Pg 13,5

7

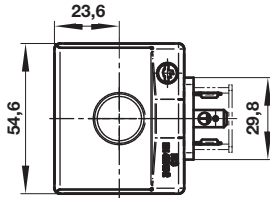


Dimensions in mm
Projection/First angle




Circuit diagrams


1




4




Silencer Model: T40C1800




Exhaust guard Model: 0613422



Cable gland



For cable Ø	A	B	C		Model
5 ... 9	M20 x 1,5	9	36	24	0110854
6 ... 12	M20 x 1,5	9	36	24	0110855

Warning

These products are intended for use in industrial compressed air and rail transport systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/data**«. Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren GmbH.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.