



# 24010, 3/2 Direct solenoid actuated poppet valve

- > 1/4" (G or NPT) Inline & NAMUR
- Main application: Single acting actuators in intrinsically safe circuits
- Approval according to IEC 61508, multichannel up to SIL 3
- Solenoid valve with low power consumption
- High operational reliability even after long periods of non-operation
- Suited for outdoor use under critical environment conditions
- > Universal flow direction





## **Technical features**

#### Medium:

Neutral or aggressive, gaseous fluids which do not damage the product or affect the function (e.g. compressed air, nitrogen). Based on ISO 8573-1-2010 classification 1-2-3.

#### Operation:

Direct solenoid operated poppet valve

### Operating pressure:

0 ... 10 bar (0 ... 145 psi)

## Orifice:

5 mm

#### Flow:

Gaseous fluids: 375 l/min Liquid fluids: Kv 0,34

#### Port size:

G1/4, 1/4 NPT, G1/4 NAMUR or 1/4 NPT NAMUR

NAMUR Interface with integrated recirculation from the exhaust air to the acutator spring chamber

#### Flow direction:

Universal

## Mounting position:

Any, but preferably with solenoid vertical

## Ambient/Media temperature:

-25 ... +80°C (-13 ... +176°F)
Depending on solenoid system.
Air supply must be dry enough
to avoid ice formation at
temperatures below +2°C (35°F).
For outdoor installations all
connections must be protected
against the penetration of moisture and a solenoid with IP66
protection must be used!

#### Materials:

Body: Aluminium anodized (suitable for high humidity, sulphuric, sodium chloride or ammonia environments), brass 2.0401, stainless steel 1.4404 (316 L) Inner parts: Stainless steel, bra

Inner parts: Stainless steel, brass Solenoid housing: Aluminium anodized

Seals: NBR

#### Further versions:

On request

#### Flow conversion:

Cv US Gallon/min (water) = I/min (air) x 0,001 Kv m³/h (water) = I/min (air) x 0,000906

## Technical data

Housing: Brass, seals: NBR -25 ... +80°C (-13 ... +176°F)

Symbol	Port size	Operating pressure (bar)	Manual override	Test certificate IEC 61508	Weight (kg)	Drawing No.	Model
2	1/4 NPT	0 10	Not possible	Χ	0,65	1	2401087200400000
	G1/4	0 10	Not possible	Χ	0,65	1	2401088200400000
13							

## Housing: Stainless steel, seals: NBR -25 ... +80°C (-13 ... +176°F)

Symbol	Port size	Operating pressure (bar)	Manual override	Test certificate IEC 61508	Weight (kg)	Drawing No.	Model
2	1/4 NPT	0 10	Not possible	Χ	0,65	2	2401012200400000
	G1/4	0 10	Not possible	Χ	0,65	2	2401086200400000
13							

#### Housing: Aluminium anodized, seals: NBR -25 ... +80°C (-13 ... +176°F)

Symbol	Port size	Operating pressure (bar)	Manual override	Test certificate IEC 61 508	Weight (kg)	Drawing No.	Model	
3 2	G1/4 NAMUR	0 10	Retrofittable	Χ	0,55	3	2401091200400000	
12 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	1/4 NPT NAMUR	0 10	Retrofittable	X	0,55	3	2401090200400000	
3 2	G1/4 NAMUR	0 10	Retrofittable	Χ	0,55	4	2401009200400000 *1)	
12 17 W								

\*1) Port 1 in flange according to VDI/VDE 3845 for attachment of positioners or to interlinking plate (see data sheet 5.4.830)







## Solenoid parameters for use in non harardous locations


Switch-on voltage	Current con- sumption	Holding current	Power consumption	Pick-up delay typical *2)	Protection class IP	Ex-Protection (ATEX-Cate- gory)	Temperature Ambient/Fluid	Weight	Model
(V)	(mA)	(mA)	(W)	(s)			(°C)	(kg)	
18 28	62	> 40	1,5 at 24 V	3	IP66 with cable gland (cable Ø 5 10 mm) is in scope of delivery	-	-40 +80	0,85	2004

## Solenoid parameters for use in intrinsically safe circuits

Switch-on voltage	Holding current	Holding voltage	Pick-up delay typical *2)	Protection class IP	Ex-Protection (ATEX-Cate- gory)	Temperature Ambient/Fluid	Weight	Model
(V)	(mA)	(V)	(s)			(°C)	(kg)	
17 28	> 40	~ 5	25		II 2G Ex ia IIC T5/ T6 Gb II 2D Ex ia IIIC T95°C Db	T5: -40 +70 T6: -40 +55 -40 +70	0,85	2004

<sup>\*2)</sup> Depending on intrinsically current supply

## Operating sequence

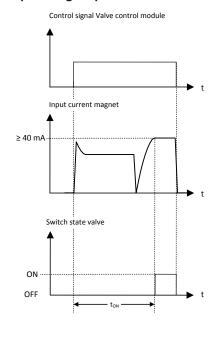

## **Approvals**

Model	Approvals ATEX	IECEx
2004	EPS 16 ATEX 1 001	IECEx EPS 16.0001

#### Function of solenoid drive

To switch the direct operated valve, a certain energy is required. This energy is stored in a capacitor. The charging voltage is 17 V. The higher the supply voltage, the shorter the charging time. As soon as the charging voltage has been reached, the valve switches. The small current now flowing through the coil is sufficient to hold the valve in the open position. At least 40 mA are required for this.

#### Current supply units:


When selecting an intrinsically safe power supply, it is important to observe the maximum permissible values acc. to the EU-Type-Examination Certificate EPS 16 ATEX 1 001 respectively IECEx EPS 16.0001 U, 28 V, I, 110 mA, P, 1,5 W. The effective internal capacities  $C_i$ ; and inductivities I, of the solenoid are negligible low.

## Item numbers for international approvals

Country/Approvals	Solenoid series/ Code	2004
Europe/ATEX	Standard	X
International/IECEx	Standard	×
China/NEPSI	-01	-
Brasil/INMETRO	-02	-
Korea/KOSHA	-03	-
Russia, Kazakhstan & Belarus/TR-CU 012	-04	×
India/CCOE	Standard	×
Taiwan/ITRI	Standard	-

Example: 0000000200400000-04 (Solenoid: 2004; Approval: TR-CU 012)

## Circuit diagram









## **Accessories**



<sup>\*3)</sup> For indoors use

Using the manual override with detent cancels the SIL-Approval!

#### **Manual Override**

The manual override is meant to be used for system testing. The valve switches back into normal position when deenergized.

## NAMUR accessories (only G1/4)



<sup>\*5)</sup> The throttle control plate 4040239 has a minimum flow rate for safety reason.

<sup>\*4)</sup> For outdoors use, opening pressure ~ 0,2 bar

<sup>\*6)</sup> Technical details see catalogue page 5.4.820



Incorporating




Dimensions in mm Projection/First angle


 $\bigoplus$ 

## Dimensions Valves




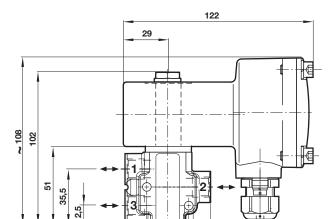


5,5 27 55





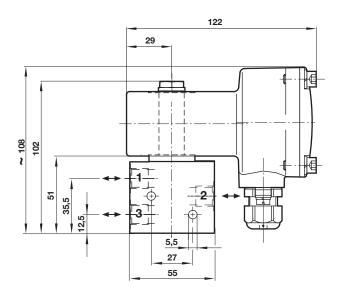





1 Port size G1/4 or 1/4 NPT





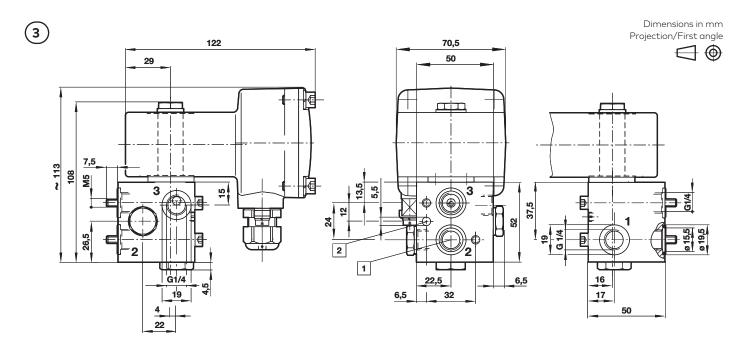

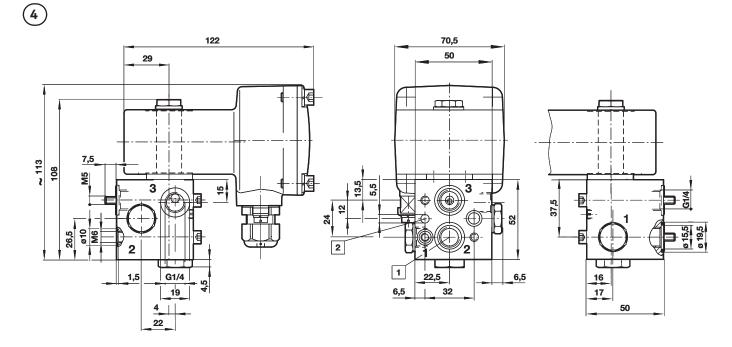


1 Port size G1/4 or 1/4 NPT2 3 mm deep

## Add-on manual override

Without detent

Model: 0600205



Please note: add-on manual override for NAMUR valves provided only for commissioning and tests

## Incorporating




## NAMUR hole pattern (actuator side)

Dimensions in mm Projection/First angle








Coding stud threaded 2 8 mm deep

NAMUR quick exhaust module for a better kv-value by exhaust see data sheet 5.4.820

NAMUR interlinking plates in redundancy design for »safety exhausting« and »safety ventilating« see data sheet 5.4.830

#### **Accessories**


Silencer Model: plastic: M/S2, C/S2



В	G	С	ØD	Weight (	g) Model
G1/4	7	35,5	15,5	2,9	M/S2
1/4 NPT	7	35,5	15,5	2,9	C/S2


## Silencer Model:

brass: T40C2800, MS002A stainless steel: 0014613, 0613678





В	С	G	$\Sigma =$	Weight (g)	Model
G1/4	33	8	17	18	T40C2800
1/4 NPT	35	8	9/16"	18	MS002A
G1/4	36	8	16	23	0014613
1/4 NPT	36	8	17	67	0613678


## **Exhaust guard** Model: 0613422




## Single connection plate Model: 0612790




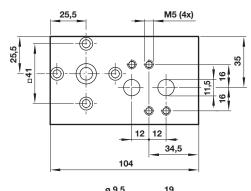



## **NAMUR** rip Model: 0612791














## Yoke Model: 0540593



## Throttle control plate

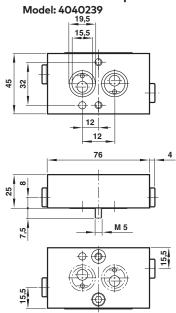



## 90° Mounting plate Model: 0613453




#### Dimensions in mm Projection/First angle









## Quick exhaust module Typ: 4050218



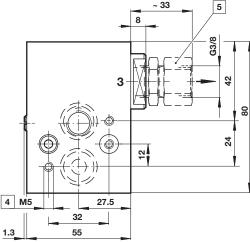



- 1 Flanged surface NAMUR or externally mounted valve
- 2 Flanged surface NAMUR actuator
- 3 Push-in threaded piece after plate mounting (to secure correct position)
- 48 mm deep
- 5 Flow regulator retrofittable

#### Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under **»Technical features/data«**.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.